





BONTOP Lighting

Two-color panel light

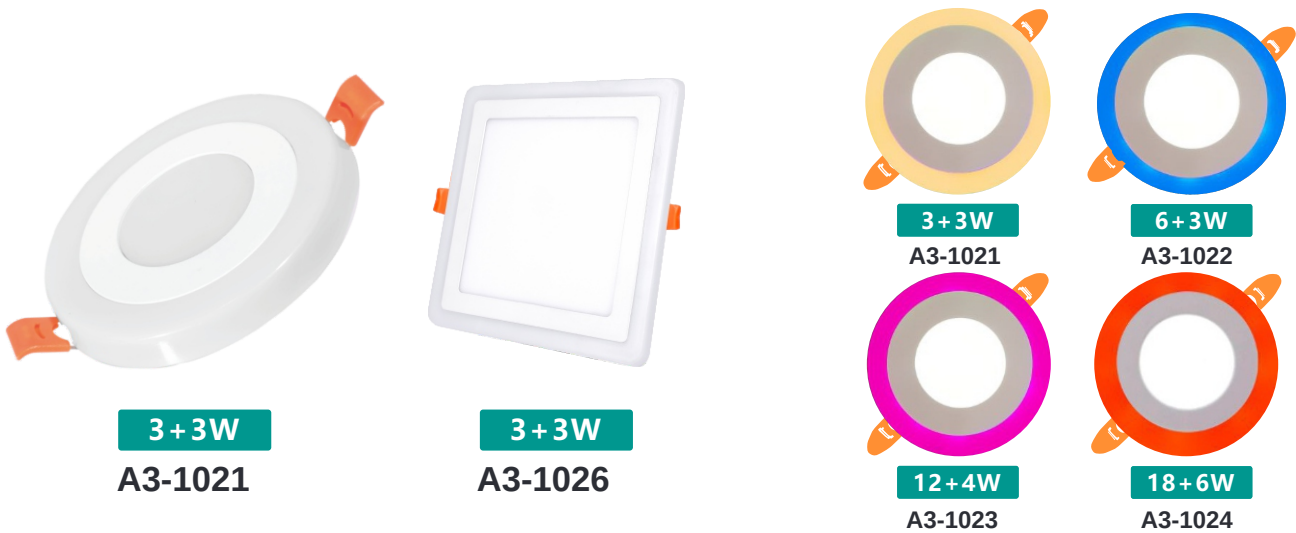


PRODUCT PARAMETERS

- Voltage: 175-265V./85-265V. 50-60Hz
- Ra: ≥80
- Beam Angle: 180°
- Service life: 25000Hours
- PF: ≥0.9
- Material: Aluminium + iron
- Lamp type: SMD

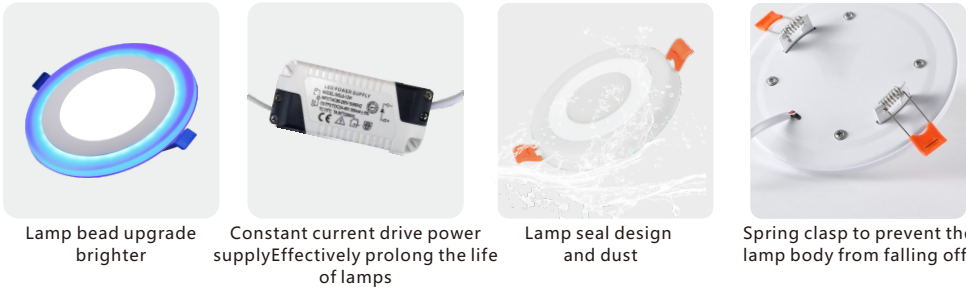


Model No.	Power	Color	Lumens	Style	Lamp's Body Size	Cut Out	Cartonsize	PCS/Box
A3-1021/R	3+3W	WH+BL/WH+WW	80-100LM/W	Pattern/Bubbles	105mm	75mm	57*42*23cm	100
A3-1022/R	6+3W	WH+BL/WH+WW	80-100LM/W	Pattern/Bubbles	145mm	105mm	42*32*32cm	40
A3-1023/R	12+4W	WH+BL/WH+WW	80-100LM/W	Pattern/Bubbles	195mm	155mm	42*41*21cm	20
A3-1024/R	18+6W	WH+BL/WH+WW	80-100LM/W	Pattern/Bubbles	245mm	210mm	51*42*26cm	20
A3-1025/R	24+12W	WH+BL/WH+WW	80-100LM/W	Pattern/Bubbles	320mm	280mm	43*34.5*35cm	10
A3-1026/S	3+3W	WH+BL/WH+WW	80-100LM/W	Pattern/Bubbles	105mm	75mm	57*42*23cm	100
A3-1027/S	6+3W	WH+BL/WH+WW	80-100LM/W	Pattern/Bubbles	145mm	105mm	42*32*32cm	40
A3-1028/S	12+4W	WH+BL/WH+WW	80-100LM/W	Pattern/Bubbles	195mm	155mm	42*41*21cm	20
A3-1029/S	18+6W	WH+BL/WH+WW	80-100LM/W	Pattern/Bubbles	245mm	210mm	51*42*26cm	20
A3-1030/S	24+12W	WH+BL/WH+WW	80-100LM/W	Pattern/Bubbles	320mm	280mm	43*34.5*35cm	10



BONTOP Lighting

Two-color panel light

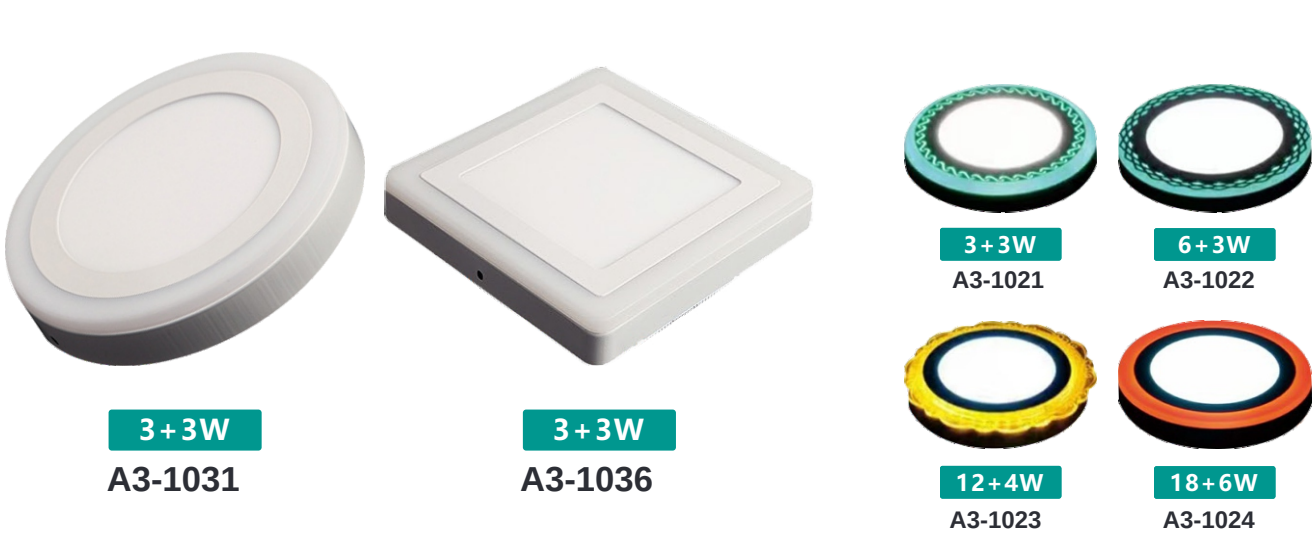


PRODUCT PARAMETERS

- Voltage: 175-265V./85-265V. 50-60Hz
- Ra: ≥80
- Beam Angle: 180°
- Service life: 25000Hours
- PF: ≥0.9
- Material: Aluminium + iron
- Lamp type: SMD




Model No.	Power	Color	Lumens	Style	Lamp's Body Size	Cartonsize	PCS/Box
A3-1031/R	3+3W	WH+BL/WH+WW	80-100LM/W	Pattern/Bubbles	105*105mm	57*42*23cm	100
A3-1032/R	6+3W	WH+BL/WH+WW	80-100LM/W	Pattern/Bubbles	145*145mm	42*32*32cm	40
A3-1033/R	12+4W	WH+BL/WH+WW	80-100LM/W	Pattern/Bubbles	195*195mm	42*41*21cm	20
A3-1034/R	18+6W	WH+BL/WH+WW	80-100LM/W	Pattern/Bubbles	245*245mm	51*42*26cm	20
A3-1035/R	24+12W	WH+BL/WH+WW	80-100LM/W	Pattern/Bubbles	320*320mm	43*34.5*35cm	10
A3-1036/S	3+3W	WH+BL/WH+WW	80-100LM/W	Pattern/Bubbles	105*105mm	57*42*23cm	100
A3-1037/S	6+3W	WH+BL/WH+WW	80-100LM/W	Pattern/Bubbles	145*145mm	42*32*32cm	40
A3-1038/S	12+4W	WH+BL/WH+WW	80-100LM/W	Pattern/Bubbles	195*195mm	42*41*21cm	20
A3-1039/S	18+6W	WH+BL/WH+WW	80-100LM/W	Pattern/Bubbles	245*245mm	51*42*26cm	20
A3-1040/S	24+12W	WH+BL/WH+WW	80-100LM/W	Pattern/Bubbles	320*320mm	43*34.5*35cm	10





BONTOP Lighting

singel color panel light



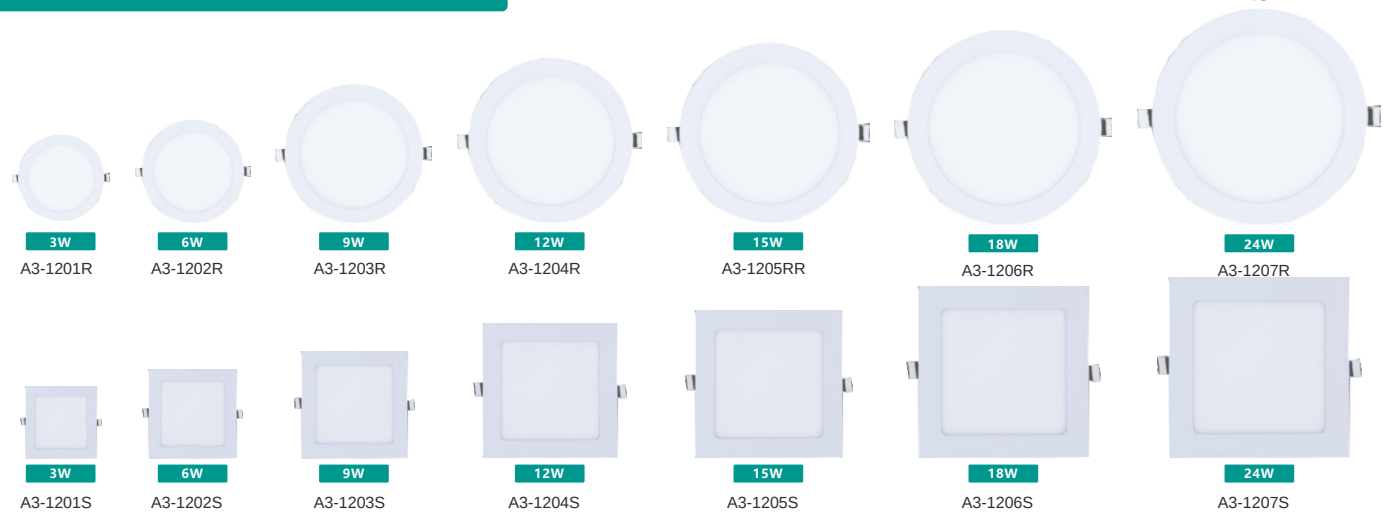


PRODUCT PARAMETERS

- Voltage: 175-265V. 50-60Hz
- Rendering finger: ≥ 80
- Beam Angle: 180°
- Service life: 25000Hours
- PF: ≥ 0.9
- Material: Aluminum+Iron
- Lamp type: SMD
- Driver/adapter: External




Model No.	ITEM	Power	Color	LED CHIP	VOLTAGE	Lamp's Body Size	CUT SIZE
A3-1201/R	Round/Square	3W	6500K/4000K/3000K/3COLORS	2835-15LED	85-265V	85mm	70mm
A3-1202/R	Round/Square	6W	6500K/4000K/3000K/3COLORS	2835-30LED	85-265V	120mm	105mm
A3-1203/R	Round/Square	9W	6500K/4000K/3000K/3COLORS	2835-45LED	85-265V	145mm	135mm
A3-1204/R	Round/Square	12W	6500K/4000K/3000K/3COLORS	2835-60LED	85-265V	170m	155mm
A3-1205/R	Round/Square	15W	6500K/4000K/3000K/3COLORS	2835-75LED	85-265V	190mm	175mm
A3-1206/R	Round/Square	18W	6500K/4000K/3000K/3COLORS	2835-90LED	85-265V	220mm	205mm
A3-1207/R	Round/Square	24W	6500K/4000K/3000K/3COLORS	2835-120LED	85-265V	300mm	275mm
A3-1201/S	Round/Square	3W	6500K/4000K/3000K/3COLORS	2835-15LED	85-265V	85*85mm	70*70mm
A3-1202/S	Round/Square	6W	6500K/4000K/3000K/3COLORS	2835-30LED	85-265V	120*120mm	105*105mm
A3-1203/S	Round/Square	9W	6500K/4000K/3000K/3COLORS	2835-45LED	85-265V	145*145mm	135*135mm
A3-1204/S	Round/Square	12W	6500K/4000K/3000K/3COLORS	2835-60LED	85-265V	170*170mm	155*155mm
A3-1205/S	Round/Square	15W	6500K/4000K/3000K/3COLORS	2835-75LED	85-265V	190*190mm	175*175mm
A3-1206/S	Round/Square	18W	6500K/4000K/3000K/3COLORS	2835-90LED	85-265V	220*220mm	205*205mm
A3-1207/S	Round/Square	24W	6500K/4000K/3000K/3COLORS	2835-120LED	85-265V	300*300mm	275*275mm



BONTOP Lighting

singel color panel light

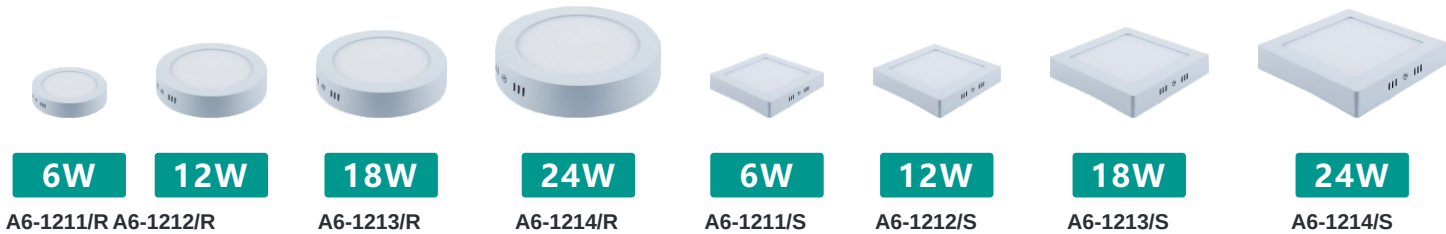

PRODUCT PARAMETERS


- Voltage: 175-265V./85-265V. 50-60Hz
- Ra: ≥ 80
- Beam Angle: 180°
- Service life: 25000Hours
- PF: ≥ 0.9
- Material: Aluminum+Iron
- Lamp type: SMD
- Driver/adapter: External



120° large Angle beam



Constant current drive power supply
Effectively prolong the life of lamps




PS light guide plate




Aluminum lamp body

Model No.	Power	Color	LED CHIP	VOLTAGE	Lamp's Body Size	CUT SIZE
A3-1211/R	6W	6500K/4000K/3000K/3COLORS	2835-30LED	85-265V	120*120mm	105mm
A3-1212/R	12W	6500K/4000K/3000K/3COLORS	2835-60LED	85-265V	170*170mm	155mm
A3-1213/R	18W	6500K/4000K/3000K/3COLORS	2835-90LED	85-265V	220*220mm	205mm
A3-1214/R	24W	6500K/4000K/3000K/3COLORS	2835-120LED	85-265V	300*300mm	275mm
A3-1211/S	6W	6500K/4000K/3000K/3COLORS	2835-30LED	85-265V	120*120mm	105mm
A3-1212/S	12W	6500K/4000K/3000K/3COLORS	2835-60LED	85-265V	170*170mm	155mm
A3-1213/S	18W	6500K/4000K/3000K/3COLORS	2835-90LED	85-265V	220*220mm	205mm
A3-1214/S	24W	6500K/4000K/3000K/3COLORS	2835-120LED	85-265V	300*300mm	275mm


Installation procedure

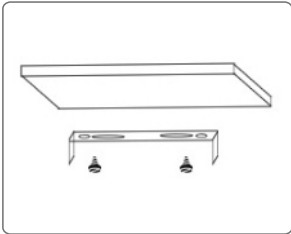


1. Fix the support on the flowering board and reinforce it with darts

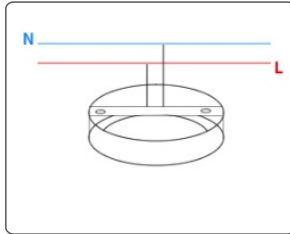


2. Fix the power supply at the bottom of the lamp, and connect the two power cables to the L/N of the 220V power cable.

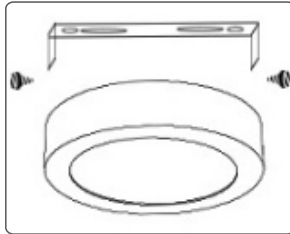

3. Fix the lamp body, and then use the dart wire to fix the lamp body.

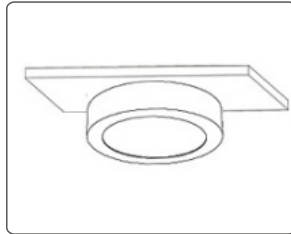

4. After installation, turn on the light and power, whether the lamp can be used normally.

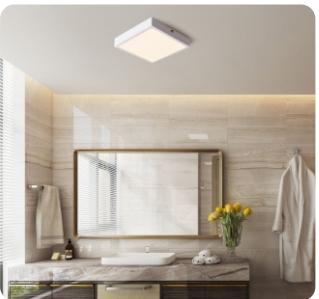



BONTOP Lighting

singel color panel light




6W
A3-1101

12W
A3-1102

PRODUCT PARAMETERS

- Voltage: 175-265V./85-265V. 50-60Hz
- Ra: ≥ 80
- Beam Angle: 180°
- Service life: 25000Hours
- PF: ≥ 0.9
- Material: ABS+Iron
- Lamp type: SMD
- Driver/adapter: External



Slim design as thin
as 0.85cm



Constant current drive power supply
Effectively prolong the life of lamps




Lamp seal design
and dust




Spring clasp to prevent the
lamp body from falling off

Model No.	Power	Color	Lumens	Lamp's Body Size	Cut Out	Carton size	PCS/Box
A3-1101	6W	WH/WW	80-100LM/W	105mm	75mm	61.5*20*27cm	100
A3-1102	12W	WH/WW	80-100LM/W	145mm	105mm	70.5*17*35cm	100


Installation procedure

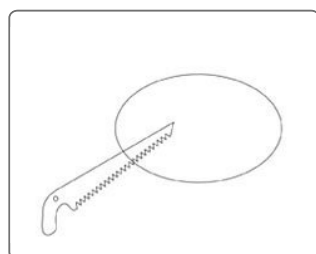


1.Cut a hole in the ceiling.

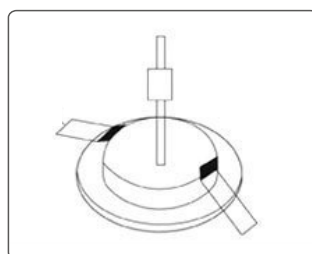


2.Connect the light fixtures with
reserved wires

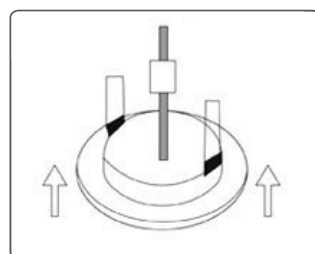

3.Put the buckle on both sides, that is,
the installation is complete.

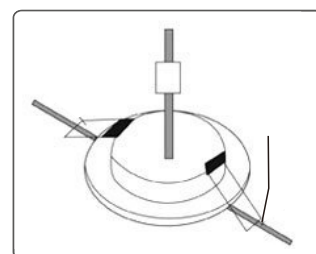

4. The lamp and spring have been plugged
into the hole, adjusted to the appropriate
position, and the installation is complete




corridor



Home lighting



Supermarket

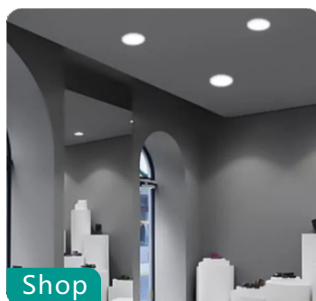

Shop



BONTOP Lighting

Glass light




5+5W
A3-1011

PRODUCT PARAMETERS

- Voltage: 175-265V. 50-60Hz
- Ra: ≥ 80
- Beam Angle: 180°
- Service life: 25000Hours
- PF: ≥ 0.9
- Material: Aluminum + Glass
- Lamp type: COB
- Driver/adapter: External



Lamp bead upgrade
brighter



120° wide Angle
light beam bright



5+5W
A3-1011




9+9W
A3-1012



18+18W
A3-1014



24+24W
A3-1015




Lamp seal design
water and dust




Spring clasp to prevent the
lamp body from falling off

Model No.	Power	Color	Lumens	Style	Lamp's Body Size	Cut Out	Carton size	PCS/Box
A3-1011	5+5W	WH+WW/WH+BU	100-120LM/W	Classic/Pattern	100mm	75mm	56*45*23cm	100
A3-1012	9+9W	WH+WW/WH+BU	100-120LM/W	Classic/Pattern	120mm	95mm	62.5*23*26cm	50
A3-1013	12+12W	WH+WW/WH+BU	100-120LM/W	Classic/Pattern	160mm	125mm	45*34*34cm	40
A3-1014	18+18W	WH+WW/WH+BU	100-120LM/W	Classic/Pattern	200mm	165mm	45*42*22cm	20
A3-1015	24+24W	WH+WW/WH+BU	100-120LM/W	Classic/Pattern	240mm	205mm	50*50*26.5cm	20


Installation procedure

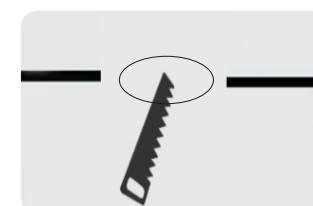


1.Cut a hole in the ceiling.

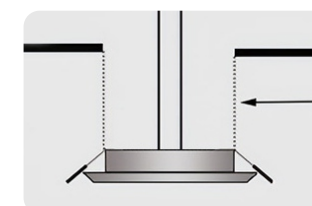


2.Connect the light fixtures with
reserved wires

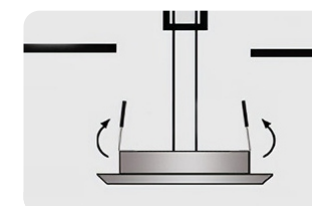

3.Place the spring clamp vertically
into the cut

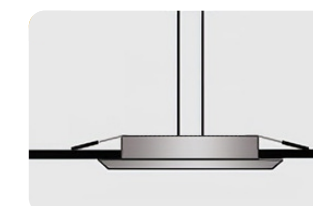

4.Put the buckle on both sides, that is,
the installation is complete.

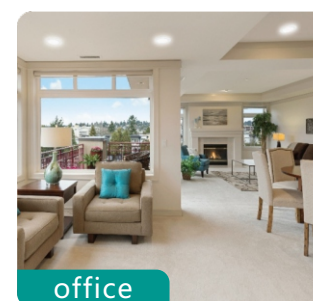


office



corridor



mall

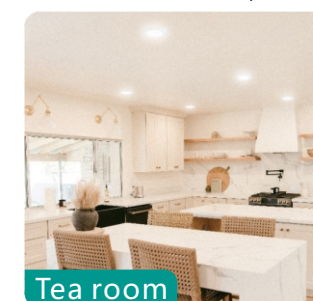


Tea room



BONTOP Lighting

Bezel-free panel light

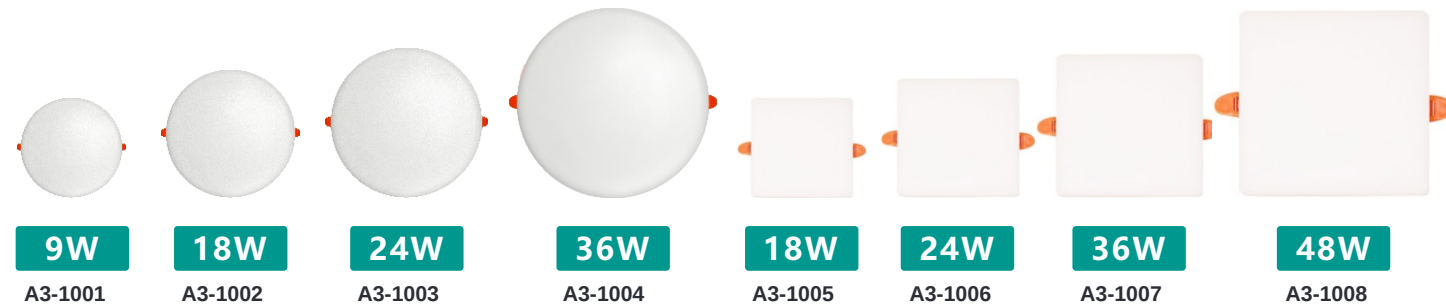


PRODUCT PARAMETERS

- Voltage: 175-265V. 50-60Hz
- Rendering finger: ≥ 80
- Beam Angle: 180°
- Service life: 25000Hours
- PF: ≥ 0.9
- Material: Iron + PP
- Lamp type: SMD
- Driver/adaptor: External





Model No.	Style	Power	Color	Lumens	Lamp's Body Size	Cut Out	Carton size	PCS/Box
A3 1001/R	RECESSED	9W	3000k/6000	100-120LM/W	85mm	50-70mm	54.5*44*25cm	100
A3 1002/R	RECESSED	18W	3000k/6000	100-120LM/W	120mm	50-100mm	44*44*32cm	60
A3 1003/R	RECESSED	24W	3000k/6000	100-120LM/W	170mm	50-150mm	44*39*41cm	40
A3 1004/R	RECESSED	36W	3000k/6000	100-120LM/W	220mm	50-205mm	52*44*26.5cm	20
A3 1005/S	RECESSED	9W	3000k/6000	100-120LM/W	85mm	-	54.5*44*25cm	100
A3 1006/S	SURFACE	18W	3000k/6000	100-120LM/W	120mm	-	44*44*32cm	60
A3 1007/S	SURFACE	24W	3000k/6000	100-120LM/W	170mm	-	44*39*41cm	40
A3 1008/S	SURFACE	36W	3000k/6000	100-120LM/W	220mm	-	52*44*26.5cm	20

Installation procedure

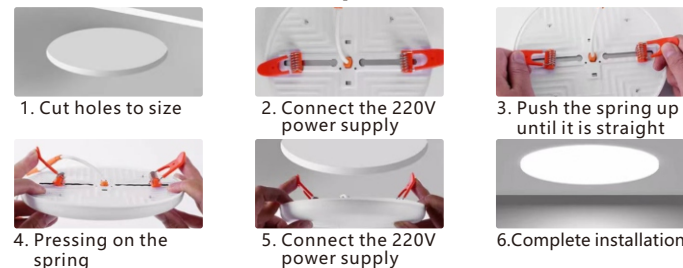


Installation tips

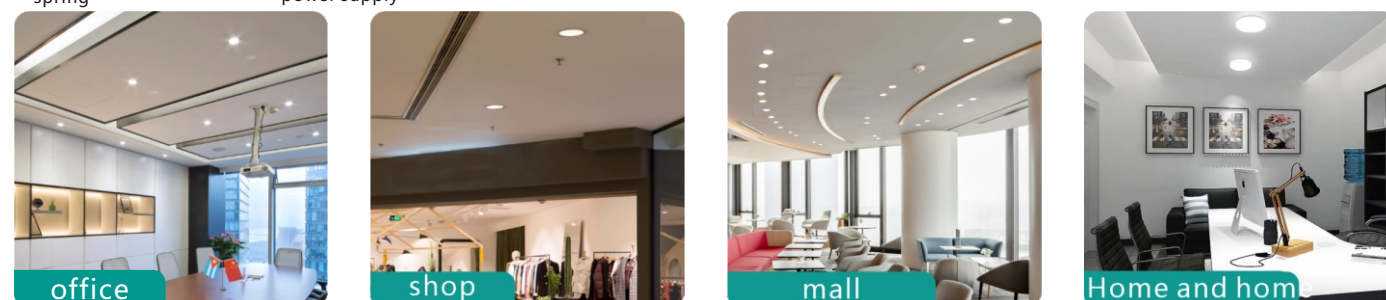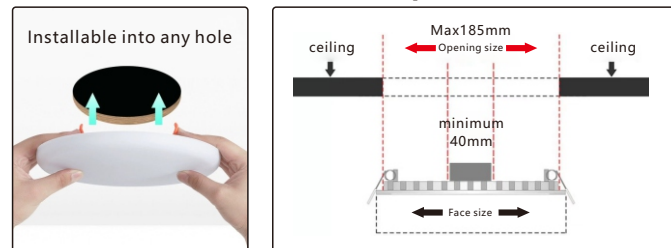


BONTOP Lighting

singel color panel light

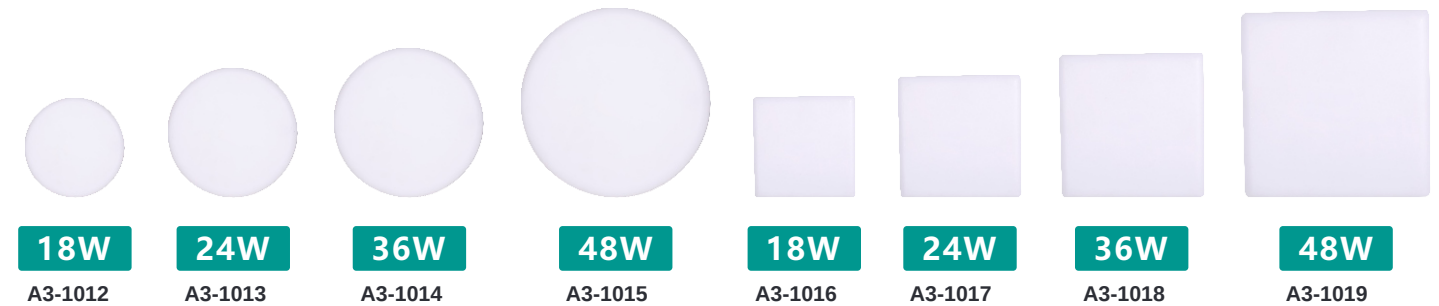


PRODUCT PARAMETERS

- Voltage: 175-265V./85-265V. 50-60Hz
- Ra: ≥ 80
- Beam Angle: 180°
- Service life: 25000Hours
- PF: ≥ 0.9
- Material: ABS+Iron
- Lamp type: SMD
- Driver/adaptor: External

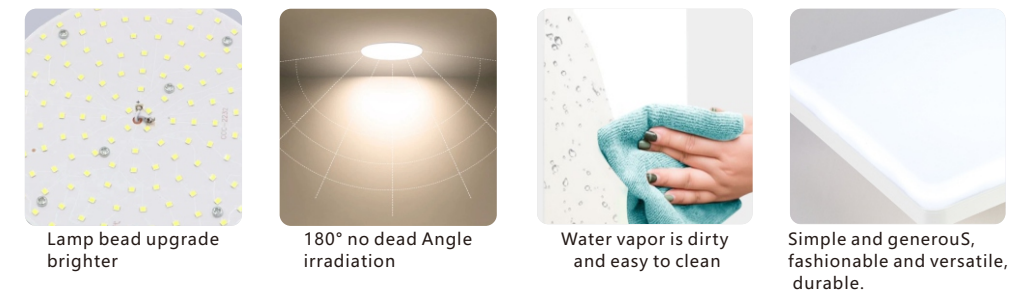

Model No.	Power	Color	LED CHIP	VOLTAGE	Lamp's Body Size	CUT SIZE
A3-1012/R	6W	6500K/4000K/3000K/3COLORS	2835-15LED	85-265V	120mm	105mm
A3-1013/R	12W	6500K/4000K/3000K/3COLORS	2835-15LED	85-265V	170m	155mm
A3-1014/R	18W	6500K/4000K/3000K/3COLORS	2835-15LED	85-265V	220mm	205mm
A3-1015/R	24W	6500K/4000K/3000K/3COLORS	2835-15LED	85-265V	300mm	275mm
A3-1016/S	6W	6500K/4000K/3000K/3COLORS	2835-15LED	85-265V	120mm	105mm
A3-1017/S	12W	6500K/4000K/3000K/3COLORS	2835-15LED	85-265V	170m	155mm
A3-1018/S	18W	6500K/4000K/3000K/3COLORS	2835-15LED	85-265V	220mm	205mm
A3-1019/S	24W	6500K/4000K/3000K/3COLORS	2835-15LED	85-265V	300mm	275mm

Installation procedure

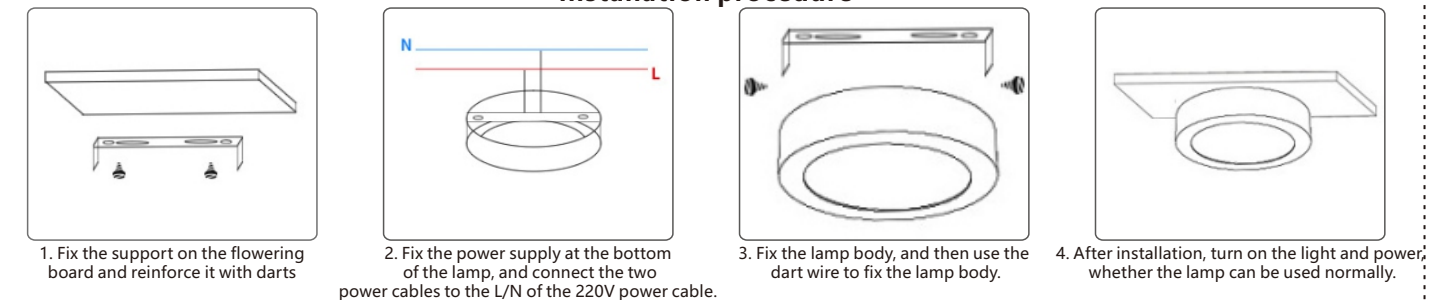



BONTOP Lighting

Moisture-proof lamp



PRODUCT PARAMETERS

- Voltage: AC220V
- Ra: ≥ 80
- Beam Angle: 180°
- Service life: 20000Hours
- PF: ≥ 0.9
- Material: ABS+PC
- Lamp type: SMD



A3-1801



A3-1802



A3-1803



A3-1804

Model No.	Power	Color	Lumens	LED	MATERIAL	Lamp's Body Size	Carton size	PCS/Box
A3-1801	15W	WH/WW	1200LM	40PCS	ABS+PC	90mm	59.5*44*30cm	50
A3-1802	20W	WH/WW	1400LM	48PCS	ABS+PC	125mm	55*43*35cm	30
A3-1803	15W	WH/WW	1200LM	40PCS	ABS+PC	160mm	54.5*34*20cm	50
A3-1804	20W	WH/WW	1400LM	48PCS	ABS+PC	190mm	67*45*35cm	30

Interior view



plot



courtyard



waterproof



Screw fitting



BONTOP Lighting

Ceiling lamp



7W

A3-1040



14W

A3-1041




21W

A3-1042

PRODUCT PARAMETERS

- Voltage: 175-265V./85-265V. 50-60Hz
- Ra: ≥ 80
- Beam Angle: 180°
- Service life: 25000Hours
- PF: ≥ 0.9
- Material: Aluminium + iron
- Lamp type: COB



Strong stainless steel spring



High quality aluminum lamp body







COB imported chips




Die cast aluminum radiator

Model No.	Power	Bod color	Color	Cut oat	Lamp's Body Size	Carton Sirze	PCS/Box
A3-1040	7W	Black /White	WH+WW	75mm*1	92*92mm	62*34*40cm	100
A3-1041	14W	Black /White	WH+WW	75mm*2	92*175mm	62*34*38cm	50
A3-1042	21W	Black /White	WH+WW	75mm*3	32*250mm	50*34*30cm	20

Installation tips



Installation tips

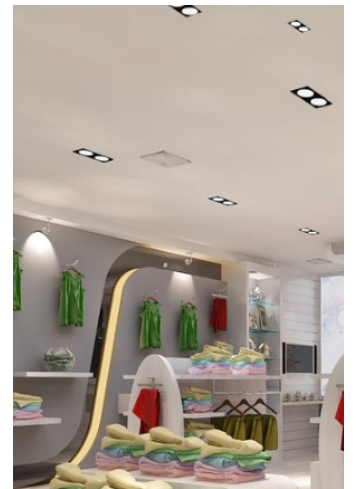



BONTOP Lighting


COB ceiling light



5W
A3-1703

PRODUCT PARAMETERS

- Voltage: AC220V
- Ra: ≥ 80
- Beam Angle: 180°
- Service life: 20000Hours
- PF: ≥ 0.9
- Material: pp plastic+Aluminium
- Lamp type: COB



One light with three colors



No video flash for
mobile phone shooting



The lights are high and soft

Model No.	Power	Color	Lumens	LED	Lamp's Body Size	Carton size	PCS/Box
A3-1703	5W	WH/WW/RGB	120LM	1PCS	48mm	56*31*19	200



Wine cabinet



mural




BONTOP Lighting

Panel light




40W
A2-1301

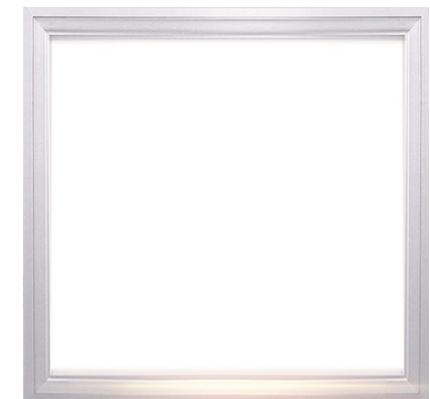

50W
A2-1302

PRODUCT PARAMETERS

- Voltage: AC220V
- Ra: ≥ 80
- Beam Angle: 180°
- Service life: 20000Hours
- PF: ≥ 0.9
- Material: pp plastic+Aluminium
- Lamp type: SMD



Sealed design to
prevent mosquitoes



White light warm light
two light colors




Highlight the bead




No video flash for
mobile phone shooting

Model No.	style	Power	Color	Lamp's Body Size	Carton size	PCS/Box
A2-1301	Slim	40W	WH/WW	595*595mm	64.5*35.5*64.5cm	10
A2-1303	Slim	50W	WH/WW	595*595mm	64.5*35.5*64.5cm	10
A2-1305	Slim	80W	WH/WW	595*595mm	64.5*35.5*64.5cm	10
A2-1302	Surface	50W	WH/WW	595*595mm	61.5*39.5*61.5cm	10


Installation procedure

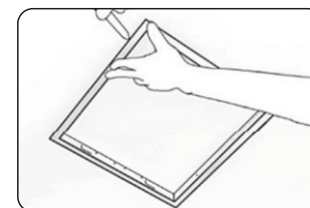


1. Use a marker to mark the inner
size of the adapter frame

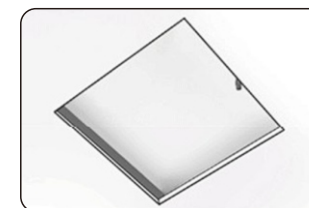

2. Cut along the size of the frame and line it

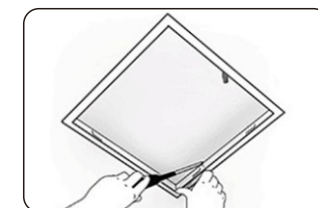

Fasten the conversion frame to
the wooden strip with screws

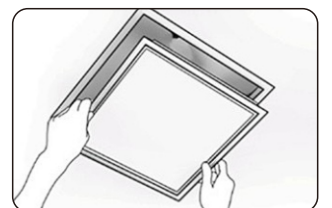


4. Connect the power
and plug in the light



office



bath

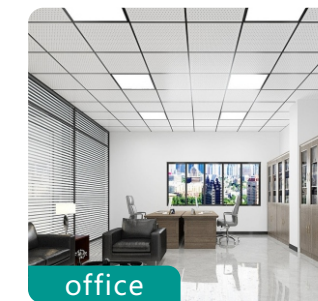


office



bath



Dust-proof lamp

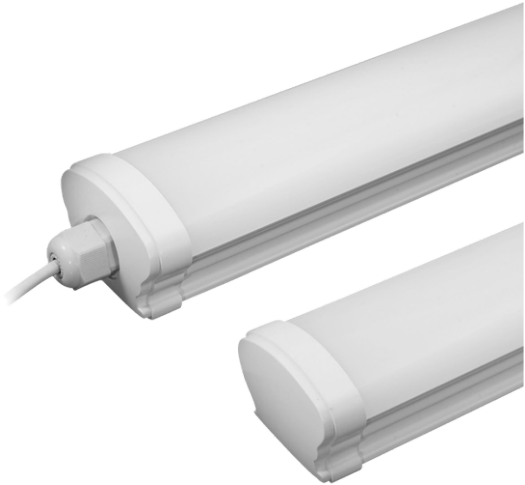

PRODUCT PARAMETERS

- Voltage: AC220V
- Ra: ≥ 80
- Beam Angle: 180°
- Service life: 20000Hours
- PF: ≥ 0.9
- Material: pp plastic+Aluminium
- Lamp type: SMD




White light warm light
two light colors



High brightness LED chip



No video flash for
mobile phone shooting



Aluminum has a
better cooling effect

Model No.	Power	Color	Lumens	Lamp's Body Size	Carton size	PCS/Box
A2-1201	80W	WH/WW	800LM	120mm	122*30*26cm	20



Repair workshop



Home scene





BONTOP Lighting

Down light



5W

A3-1050

10W

A3-1051

15W

A3-1052

20W

A3-1053

PRODUCT PARAMETERS

- Voltage: 175-265V./85-265V. 50-60Hz
- Ra: ≥ 80
- Beam Angle: 180°
- Service life: 25000Hours
- PF: ≥ 0.9
- Material: Aluminum + iron
- Lamp type: COB




Transparent mask



Quality reflective cup



Thickened aluminum lamp body



Good quality COB chip

Model No.	Power	Bod color	Color	Lamp's Body Size	Carton Sirze	PCS/Box
A3-1050	5W	Black /White	WH+WW	70*47mm	39*39*22cm	100
A3-1051	10W	Black /White	WH+WW	90*48mm	49*21*28cm	50
A3-1052	15W	Black /White	WH+WW	115*55mm	61*25*31cm	50
A3-1053	20W	Black /White	WH+WW	133*65mm	44*37*30cm	30



BONTOP Lighting

Cabinet light



5W

A3-1031

10W

A3-1033

15W

A3-1034

PRODUCT PARAMETERS

- Voltage: 175-265V./85-265V. 50-60Hz
- Ra: ≥ 80
- Beam Angle: 180°
- Service life: 25000Hours
- PF: ≥ 0.9
- Material: Aluminium + iron
- Lamp type: COB



Reinforced hanging plate



PMMA light guide column lens












No drive COB chip



Thickened aluminum lamp body

Model No.	Power	Body color	Color	Lamp's Body Size	Carton Sirze	PCS/Box
A3-1031	5W	Black /White	WH+WW	75*101mm	42*22*34cm	100
A3-1033	10W	Black /White	WH+WW	105*2mm	52*32*24cm	100
A3-1033	15W	Black /White	WH+WW	125*2.5mm	67*17*28cm	100

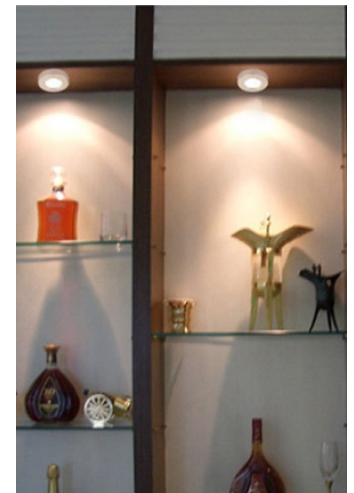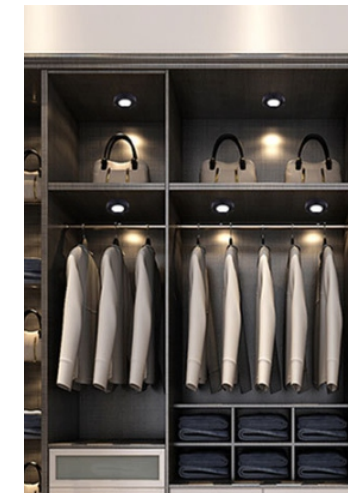



BONTOP Lighting

E27 Fan Light



24W

A1-1001-WH



24W

A1-1001-WW

PRODUCT PARAMETERS

- Type: E27
- Voltage: 110-265V. 50-60Hz
- Rendering finger: ≥ 80
- Beam Angle: 180°
- Service life: 25000Hours
- PF: ≥ 0.9
- Material: ABS + Iron + PP
- Lamp type: SMD
- Driver/adapter: External



Universal screw E27



ABS material back cover



customizable



Transparent PC cover

Model No.	Power	LED	Voltage	Lamp's Body Size	Carton size	PCS/Box
A1-1001-WH	24W	48	110-265V	$\Phi 230 \times 120$	71.5*41.5*48.5cm	30
A1-1001-WW	24W	48	110-265V	$\Phi 230 \times 120$	71.5*41.5*48.5cm	30

Three functions

Multiple installation modes



1.Press the switch once
Use alone with lights on



2.Close and open again
Use the fan separately



3.Close and open again
Fan and light on




Ceiling installation



Ceiling mounting



Wall mounting




On the bed



Living room



studio



desktop



BONTOP Lighting

Track line light



20W

A2-6402-black

2-6403B

A2-6403-black



20W

A2-6402-White

30W

A2-6403-White



20W

A2-6412-black

2-6403B

A2-6413-black



20W

A2-6412-White

30W


A2-6413-White

PRODUCT PARAMETERS

- Voltage: 175-265V. 50-60Hz
- Ra: ≥ 80
- Service life: 25000 Hours
- PF: ≥ 0.9
- Material: Aluminum
- Lamp type: SMD



High quality acrylic
lamp shade



The lamp holder can be
rotated




LED high light beads




Three light colors


Model No.	Body color	Power	LED color	Carton Size
A2-6402	White/black shell	20W	6500K/3500K/4000K	38*32*42cm
A2-6403	White/black shell	30W	6500K/3500K/4000K	51*32*25.5cm
A2-6412	White/black shell	20W	6500K/3500K/4000K	38*32*42cm
A2-6413	White/black shell	30W	6500K/3500K/4000K	51*32*25.5cm




office



bedroom



Living room



bedroom



Track spot light-COB-102





PRODUCT PARAMETERS

- Material: die-cast aluminum lamp body
- Installation method: Mounted on the rail bar/ceiling box
- Luminous Angle: 24°
- LED color: 6500K/4000K /3500K
- Light source :COB light source
- Applicable: shopping mall/clothing store jewelry store/art gallery/restaurant, etc



Model No.	Power	Body color	LED color	Carton size	PCS/Box
A2-6010	20W	Black/White	6500K/3500K/4000K	44*29*42.5cm	150/120
A2-6020	30W	Black/White	6500K/3500K/4000K	44*34*45.5cm	150/120
A2-6030	40W	Black/White	6500K/3500K/4000K	49*41.5*49.5cm	150/120

Installation procedure

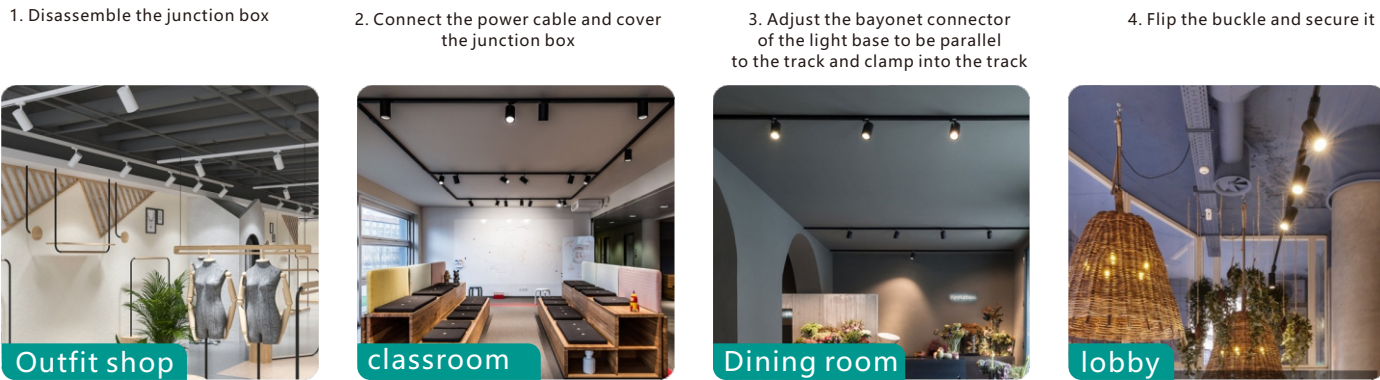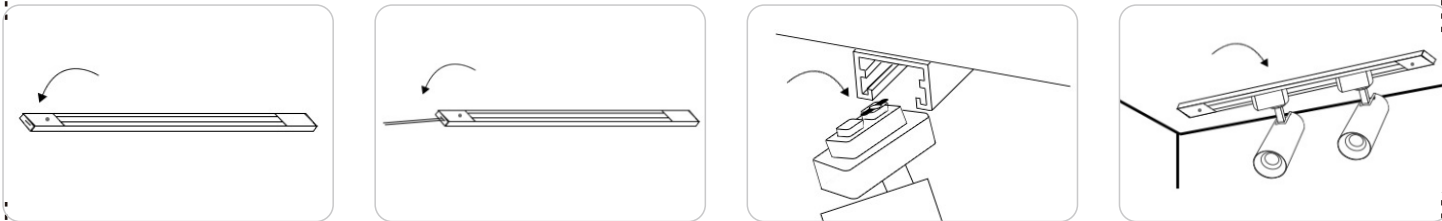

Rail strip



PRODUCT PARAMETERS

- Service life: 2 Years
- PF: ≥0.9
- Material: ABS



Model No.	Body color	long	PCS/Box
A2-6301(PR02 with 1 meter - black shell)	white/black	100	1
A2-6302 PR02 with 2 m - black shell)	white/black	200	1
A2-6303(PR02 with 3 m - black shell)	white/black	300	1
A2-6304 Normal direct - Black shell)	white/black	39	1
A2-6305 Ordinary bending - black shell)	white/black	39	1
A2-6306 Two-wire converter box - black shell)	white/black	44.5	1

Actual renderings





BONTOP Lighting

Track spot light-COB-106



40W

A2-6120-Black



50W

A2-6130-Black



Strong light source



40W

A2-6120-White




50W


A2-6130-White

PRODUCT PARAMETERS


- Material: die-cast aluminum lamp body
- Installation method: Mounted on the rail bar/ceiling box
- Luminous Angle: 24°
- LED color: 6500K/4000K /3500K
- Light source :COB light source
- Applicable: shopping mall/clothing store jewelry store/art gallery/restaurant, etc



Seiko aluminum lamp body
efficient heat dissipation,
durable



The value rotates around 330°
90° up and down adjustment




The bottom adopts bayonet
design to fix and do not fall
off for a long time




Aluminum heat dissipation
design density is strong,
good performance

Model No.	Power	Body color	LED color	Carton size	PCS/Box
A2-6120	40W	Black/White	6500K/3500K/4000K	46.5*36.5*42.5cm	50
A2-6130	50W	Black/White	6500K/3500K/4000K	49*30*49.5cm	30


Installation procedure




1. Disassemble the junction box




2. Connect the power cable and cover
the junction box



3. Adjust the bayonet connector
of the light base to be parallel
to the track and clamp into the track



4. Fix the lamp on the track by
clamping the clamp file to fix the lamp



Classroom



Dining room



Outfit shop



Office



BONTOP Lighting

Track spot light-COB-109




40W

A2-6235B



50W

A2-6245H



Strong light source



40W

A2-6235B



50W

A2-6245H

PRODUCT PARAMETERS

- Material: die-cast aluminum lamp body
- Installation method: Mounted on the rail bar/ceiling box
- Luminous Angle: 24°
- LED color: 6500K/4000K /3500K
- Light source :COB light source
- Applicable: shopping mall/clothing store jewelry store/art gallery/restaurant, etc



Preferred LED light source,
energy saving and
environmental protection



The lamp shaft rotates 360°
The lamp body rotates 90°




All aluminum lamp body,
heat dissipation efficiency




Aluminum alloy housing +
air convection design
225° large cooling surface

Model No.	Power	Body color	LED color	Carton size	PCS/Box
A2-6235	40W	Black/White	6500K/3500K/4000K	42*41.5*37.5cm	200
A2-6245	50W	Black/White	6500K/3500K/4000K	47*42.5*41.5cm	200


Installation procedure




1. Disassemble the junction box



2. Connect the power cable and cover
the junction box



3. Adjust the bayonet connector
of the light base to be parallel
to the track and clamp into the track

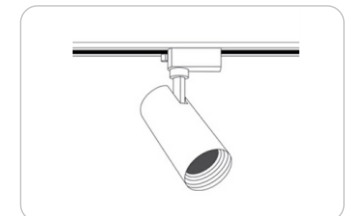


4. Fix the lamp on the track by
clamping the clamp file to fix the lamp



Beauty shop



Outfit shop



Bookstore




Supermarket



BONTOP Lighting

LED purification lamp



Strong light source



PRODUCT PARAMETERS

- Voltage: 175-265V
- Explicit reference: ≥80
- Life: 2500 hours
- Lamp body material: iron + acrylic
- Chip type: SMD
- Luminous Angle: 180°
- Color temperature: 3000K/8000K
- Driver: constant current IC




Three rows of lights are illuminated with bead foot tiles



The lamp shell is made of color steel




PP lamp cap is not easy to damage and yellow



High quality transparent PS mask

Model No.	Power	LED	Lamp's Body Size	Color Temperatur	PCS/Box
A2-1002-WH	80W	150	1200*62mm	8000-10000K	30
A2-1002-WW	80W	150	1200*62mm	3000-3500K	30
A2-1003-WH	120W	225	1200*73mm	8000-10000K	30
A2-1003-WW	120W	225	1200*73mm	3000-3500K	30
A2-1004-WH	160W	584	1200*95mm	8000-10000K	20
A2-1004-WW	160W	584	1200*95mm	3000-3500K	20


Installation procedure

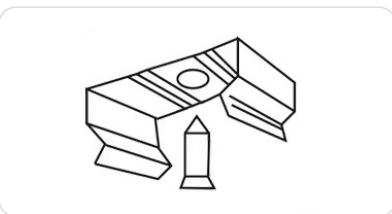

1. Set the position of the circlip corresponding to the installation position



2. Use screws to fix the circlip

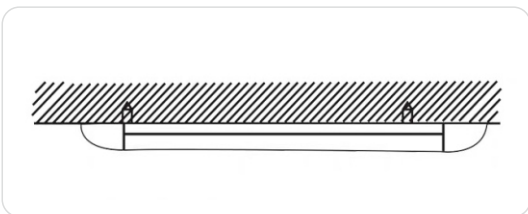

3. Press the lamp frame into the circlip to complete the installation



office



nosocomium



Interior corridor



Production workshop



BONTOP Lighting

Wall lamp (ABS)



12W

A6-1317



12W

A6-1318



12W

A6-1319



12W

A6-1320



12W

A6-1321



12W

A6-1322

PRODUCT PARAMETERS

- Voltage: 175-265V. 50-60Hz
- Ra: ≥80
- Service life: 25000 Hours
- PF: ≥0.9
- Material: ABS
- Lamp type: SMD



High quality acrylic lamp shade



ABS body



LED high light beads



Lamp seal design water and dust


Model No.	Power	Material	Body color	Color	Lamp's Body Size	Carton Size	PCS/Box
A6-1317	12W	ABS	Black	WH/WW	235*128*68mm	66.5*31.5*49cm	40
A6-1318	12W	ABS	Black	WH/WW	235*128*68mm	66.5*31.5*49cm	40
A6-1319	12W	ABS	Black	WH/WW	235*128*68mm	66.5*31.5*49cm	40
A6-1320	12W	ABS	Black	WH/WW	235*128*68mm	66.5*31.5*49cm	40
A6-1321	12W	ABS	Black	WH/WW	235*128*68mm	66.5*31.5*49cm	40
A6-1322	12W	ABS	Black	WH/WW	235*128*68mm	66.5*31.5*49cm	40



villa



plot



courtyard



family



BONTOP Lighting

Wall lamp (ABS)



2W


A6 1315-

6W


A6 1316-

PRODUCT PARAMETERS


- Voltage: 175-265V. 50-60Hz
- Ra: ≥80
- Service life: 25000 Hours
- PF: ≥0.9
- Material: ABS
- Lamp type: COB



Integrated lamp body



Bilateral luminescence




LED high light beads




Lamp seal design
water and dust

Model No.	Power	Material	Body color	Color	Lamp's Body Size	Carton Size	PCS/Box
A6 1315	2W	ABS	Black	WH/WW/RGB	80*75*65mm	44*39*33cm	100
A6 1316	6W	ABS	Black	WH/WW/RGB	140*80mm	44*39*33cm	50


Installation method




Step 1




Step 2



Step 3




Step 4




villa



plot



courtyard



family



BONTOP Lighting

Wall lamp (ABS)



Strong light
source

2W(1+1W)

A6-1002

4W(2+2W)

A6-1004

6W(3+3W)

A6-1006

8W(4+4W)

A6-1008

10W(5+5W)

A6-1010



BLACK




LD

GO

PRODUCT PARAMETERS

- Material: die-cast aluminum lamp body
- Lampshade material: PMMA high transmittance lampshade
- Color temperature: White/warm /RGB
- Light body color: black/gold
- Waterproof rating: IP65
- Applicable: outer walls, aisles, stairs, bedrooms, shopping malls and other Spaces.



Dual guide light design



High quality aluminum
lamp body is durable



Highlighting large lens
LED light source



Hidden wall mounting
humanized design

Model No.	Power	Material	Body color	Color	LED	Protection Rating	Lamp's Body Size(mm)
A6-1302	2W(1+1W)	ABS	Black/White/Gold	WH/WW/RGB	2	IP65	80*80*40mm
A6-1304	4W(2+2W)	ABS	Black/White/Gold	WH/WW/RGB	4	IP65	120*80*40mm
A6-1306	6W(3+3W)	ABS	Black/White/Gold	WH/WW/RGB	6	IP65	170*80*40mm
A6-1308	8W(4+4W)	ABS	Black/White/Gold	WH/WW/RGB	8	IP65	220*80*45mm
A6-1310	10W(5+5W)	ABS	Black/White/Gold	WH/WW/RGB	10	IP65	270*80*45mm


Installation procedure



1. Loosen the bottom panel




2. Secure the hanging plate in the
mounting position

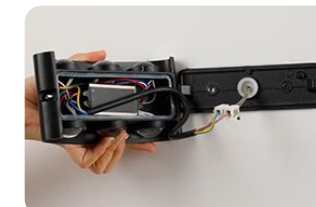


3. Link power cord



4. The hanging plate and the lamp
body are fixed together

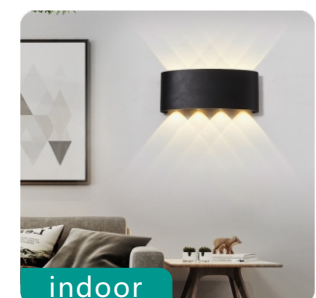

indoor

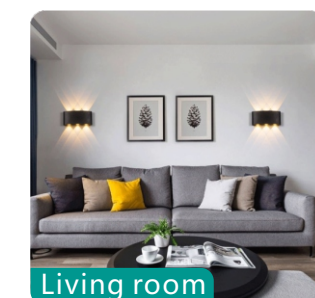

Living room



courtyard




Activity place



BONTOP Lighting

Wall lamp (ABS)



12W

A6-1313




12W

A6-1314



12W

A6-1323



12W


A6-1324

PRODUCT PARAMETERS

- Voltage: 175-265V. 50-60Hz
- Ra: ≥ 80
- Service life: 25000 Hours
- PF: ≥ 0.9
- Material: ABS
- Lamp type: SMD



High quality acrylic lamp shade



ABS body




Intelligent LED driver




Lamp seal design water and dust

Model No.	Power	Material	Body color	Color	Lamp's Body Size	Carton Size	PCS/Box
A6 1313	12W	ABS	Black	WH/WW	165*165*100mm	71.5*34*34cm	20
A6 1314	12W	ABS	Black	WH/WW	165*165*100mm	71.5*34*34cm	20
A6 1323	12W	ABS	Black	WH/WW	165*165*100mm	71.5*34*34cm	20
A6 1324	12W	ABS	Black	WH/WW	165*165*100mm	71.5*34*34cm	20


Installation method




Step 1




Step 2




Step 3




Step 4



courtyard



villa



wall




Universal multiscene




BONTOP Lighting

Wall lamp (Aluminum)



5W

A6-1101




5W


A6-1102

PRODUCT PARAMETERS

- Voltage: 175-265V. 50-60Hz
- Ra: ≥ 80
- Service life: 25000 Hours
- PF: ≥ 0.9
- Material: Aluminum
- Lamp type: SMD




High quality aluminum lamp body



Acrylic lamp shade




High light LED light beads soft and not dazzling




Lamp seal design water and dust

Model No.	Power	Material	Body color	Color	Lamp's Body Size	Carton Size	PCS/Box
A6 1101	5W	Aluminum	Black	WH/WW	110*110*80mm	54*24*29.5cm	50
A6 1102	5W	Aluminum	Black	WH/WW	110*110*80mm	54*24*29.5cm	50


Installation method




Step 1



Step 2




Step 3




Step 4




outdoors



bedroom



office



indoor



BONTOP Lighting

Wall lamp (ABS)



10W

A6-1310B



10W

A6-1310H

PRODUCT PARAMETERS

- Voltage: 175-265V. 50-60Hz
- Ra: ≥ 80
- Service life: 25000 Hours
- PF: ≥ 0.9
- Material: ABS
- Lamp type: SMD




Light emits uniformly



ABS body




LED high light beads




Lamp seal design
water and dust

Model No.	Power	Material	Body color	Color	Lamp's Body Size	Carton Size	PCS/Box
A6 1310B	10W	ABS	Black/White	WH/WW	200*220*50mm	72*38*44cm	40
A6 1310H	10W	ABS	Black/White	WH/WW	200*220*50mm	72*38*44cm	40


Installation method




Step 1



Step 2




Step 3



Step 4




Column head



lawn



Column head



lawn



BONTOP Lighting

Wall lamp (ABS)



6W

A6-1324



12W

A6-1314



6W

A6-1323



12W


A6-1313

PRODUCT PARAMETERS


- Voltage: 175-265V. 50-60Hz
- Ra: ≥ 80
- Service life: 25000 Hours
- PF: ≥ 0.9
- Material: ABS
- Lamp type: SMD




High quality acrylic lamp
shade



waterproof anti-rust,
strong solid




Aluminum wire drawing
lamp body




Lamp seal design
water and dust

Model No.	Power	Material	Body color	Color	Lamp's Body Size	Carton Size	PCS/Box
A6-1324	6W	ABS	Black	WH/WW	110*110mm	57*28*42cm	30
A6-1314	12W	ABS	Black	WH/WW	160*160mm	54.5*48.5*37cm	30
A6-1323	6W	ABS	Black	WH/WW	110*110mm	57*28*24	30
A6-1313	12W	ABS	Black	WH/WW	160*160mm	54.5*48.5*37	30


Installation method




Step 1



Step 2




Step 3




Step 4




balcony



Column head



outdoors



aisle



BONTOP Lighting

Wall lamp (ABS)



10W



10W




PRODUCT PARAMETERS

- Voltage: 175-265V. 50-60Hz
- Ra: ≥ 80
- Service life: 25000 Hours
- PF: ≥ 0.9
- Material: ABS
- Lamp type: SMD




ABS body



ABS shade




LED high light beads




Lamp seal design
water and dust

Model No.	Temperature	Power	Lamp's Body Size	Carton Size	PCS/Box
A6 1311	White light	10W	110*100*133mm	54*23*29cm	20
A6 1312	White light	10W	110*100*133mm	54*23*29cm	20


Installation method




Step 1



Step 2




Step 3




Step 4




Column head



lawn



Column head



lawn



BONTOP Lighting

Wall lamp(Aluminum)



12W

A6-1107



12W

A6-1108



12W

A6-1109



12W

A6-1110

PRODUCT PARAMETERS


- Voltage: 175-265V. 50-60Hz
- Ra: ≥ 80
- Service life: 25000 Hours
- PF: ≥ 0.9
- Material: aluminum
- Lamp type: SMD



High color rendering, high
luminous uniform, pervious
to light, the light is downy



waterproof anti-rust,
strong solid




Acrylic face mask




Lamp seal design
water and dust

Model No.	Power	Material	Body color	Color	Lamp's Body Size	Carton Size	PCS/Box
A6-1107	12W	Aluminum	Black	WH/WW	260*125*122mm	67.5*45*5*28cm	20
A6-1108	12W	Aluminum	Black	WH/WW	260*125*122mm	67.5*45*5*28cm	20
A6-1109	12W	Aluminum	Black	WH/WW	260*125*122mm	67.5*45*5*28cm	20
A6-1110	12W	Aluminum	Black	WH/WW	260*125*122mm	67.5*45*5*28cm	20


Installation method




Step 1




Step 2



Step 3



Step 4



Gate wall lamp



Outdoor wall lamp



Patio wall lamp



Villa wall lamp



BONTOP Lighting

Wall lamp (Aluminum)



10W

A6-1103



10W

A6-1104



10W

A6-1105



10W

A6-1106-

PRODUCT PARAMETERS

- Voltage: 175-265V. 50-60Hz
- Ra: ≥80
- Service life: 25000 Hours
- PF: ≥0.9
- Material: Aluminum
- Lamp type: SMD



High quality acrylic lamp shade



Aluminium alloy lamp body




Intelligent LED driver




Lamp seal design water and dust

Model No.	Power	Material	Body color	Color	Lamp's Body Size	Carton Size	PCS/Box
A6-1103	10W	Aluminum	Black	WH/WW	155*155*150mm	71.5*34*34cm	20
A6-1104	10W	Aluminum	Black	WH/WW	Φ160*150mm	71.5*34*34cm	20
A6-1105	10W	Aluminum	Black	WH/WW	160*160*150mm	71.5*34*34cm	20
A6-1106	10W	Aluminum	Black	WH/WW	Φ160*150mm	71.5*34*34cm	20


Installation method




Step 1




Step 2




Step 3



Step 4



courtyard



lawn



Column head



Universal multiscene



BONTOP Lighting

Wall lamp (Aluminum)



Strong light source

2W(1+1W)

A6-1002

4W(2+2W)

A6-1004

6W(3+3W)

A6-1006

8W(4+4W)

A6-1008

10W(5+5W)

A6-1010

12W(6+6W)


A6-1012

BLACK

GOLD

PRODUCT PARAMETERS

- Material: die-cast aluminum lamp body
- Lampshade material: PMMA high transmittance lampshade
- Color temperature: White/warm /RGB
- Light body color: black/gold
- Waterproof rating: IP65
- Applicable: outer walls, aisles, stairs, bedrooms, shopping malls and other Spaces.



Dual guide light design



High quality aluminum lamp body is durable



Highlighting large lens LED light source




Hidden wall mounting humanized design

Model No.	Power	Material	Body color	Color	LED	Protection Rating	Lamp's Body Size(mm)
A6-1002	2W(1+1W)	Aluminum	Black/White/Gold	WH/WW/RGB	2	IP65	80*80*40mm
A6-1004	4W(2+2W)	Aluminum	Black/White/Gold	WH/WW/RGB	4	IP65	120*80*40mm
A6-1006	6W(3+3W)	Aluminum	Black/White/Gold	WH/WW/RGB	6	IP65	170*80*40mm
A6-1008	8W(4+4W)	Aluminum	Black/White/Gold	WH/WW/RGB	8	IP65	220*80*45mm
A6-1010	10W(5+5W)	Aluminum	Black/White/Gold	WH/WW/RGB	10	IP65	270*80*45mm
A6-1012	12W(6+6W)	Aluminum	Black/White/Gold	WH/WW/RGB	12	IP65	320*82*50mm


Installation procedure



1. Loosen the bottom panel

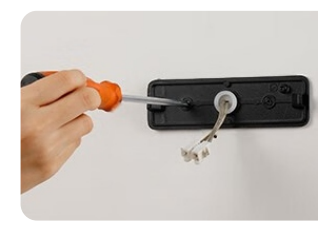


2. Secure the hanging plate in the mounting position

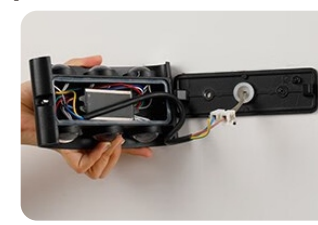


3. Link power cord



4. The hanging plate and the lamp body are fixed together

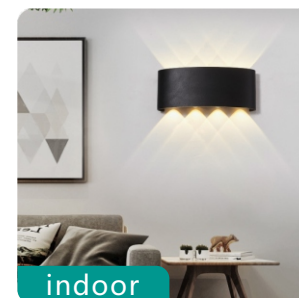

indoor

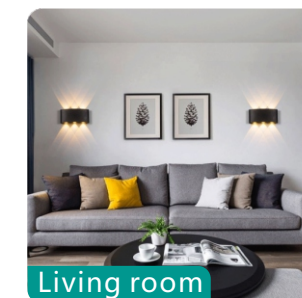

Living room



courtyard



Activity place



BONTOP Lighting

Flood light (Aluminum)



PRODUCT PARAMETERS


- Voltage: 175-265V. 50-60Hz
- Ra: ≥ 80
- Beam Angle: 180°
- Service life: 25000 Hours
- PF: ≥ 0.9
- Material: Aluminum+lens+ glass
- Lamp type: SMD
- Driver/adaptor: Drive non-isolation



Back aluminum integrated heat dissipation 180° adjustable bracket LED high light beads Lamp seal design water and dust

Model No.	Color	Power	Lamp's Body Size	Carton Size	PCS/Box
A6-6005	WH/WW	50W	210*190*41mm	51*47*25cm	20
A6-6010	WH/WW	100W	210*190*41mm	53.5*29*32.5cm	10
A6-6020	WH/WW	200W	210*190*41mm	42*37*41.5cm	6
A6-6030	WH/WW	300W	210*190*41mm	47.5*43.5*11cm	1
A6-6040	WH/WW	400W	445*445*55mm	51*49.5*10.5cm	1
A6-6060	WH/WW	600W	560*485*60mm	61.5*54.5*11cm	1

Installation display

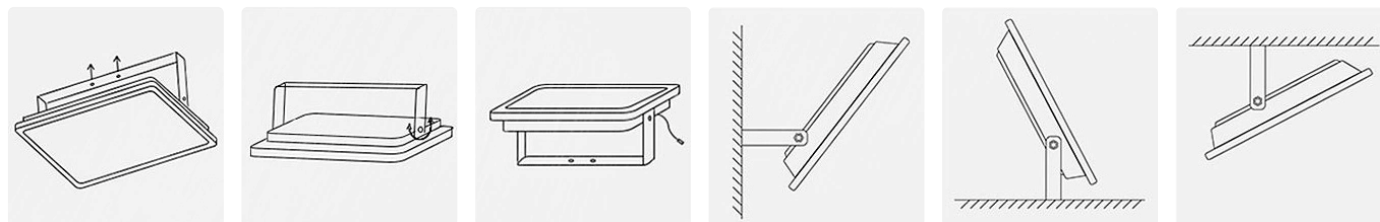

1. Attach to the wall 2. Adjust the Angle 3. Connect the power cord 4. Wall mounting 5. Pedestal mounting 6. Ceiling mounting



BONTOP Lighting

Flood light (Aluminum)



PRODUCT PARAMETERS


- Voltage: 175-265V. 50-60Hz
- Ra: ≥ 80
- Beam Angle: 180°
- Service life: 25000 Hours
- PF: ≥ 0.9
- Material: Aluminum+lens+ glass
- Lamp type: SMD
- Driver/adaptor: Drive non-isolation




Die-cast aluminum lamp body Efficient heat dissipation design High-lighted LED light beads Lamp seal design water and dust

Model No.	Color	Power	LED	Lamp's Body Size	Carton Size	PCS/Box
A6-6704	WH/WW	400W	500	600*320mm	65*37.5*20.5cm	1
A6-6705	WH/WW	500W	680	670*320mm	72*37.5*21.5cm	1
A6-6706	WH/WW	600W	750	725*320mm	78.5*37.5*23cm	1
A6-6708	WH/WW	800W	1200	725*320mm	78.5*37.5*23cm	1
A6-6710	WH/WW	1000W	1500	810*325mm	86*37.5*24cm	1

Installation display

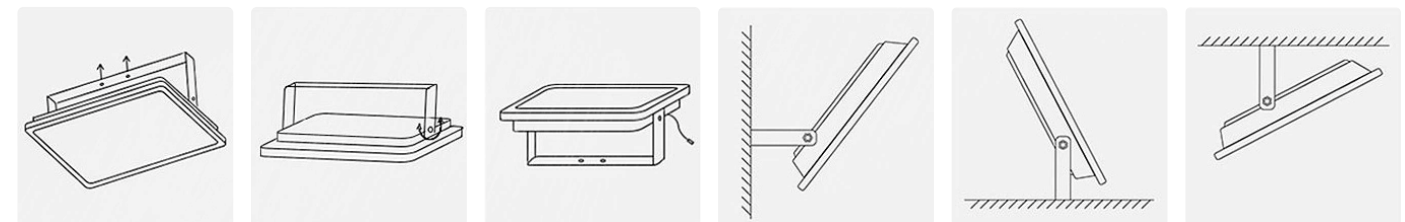

1. Attach to the wall 2. Adjust the Angle 3. Connect the power cord 4. Wall mounting 5. Pedestal mounting 6. Ceiling mounting

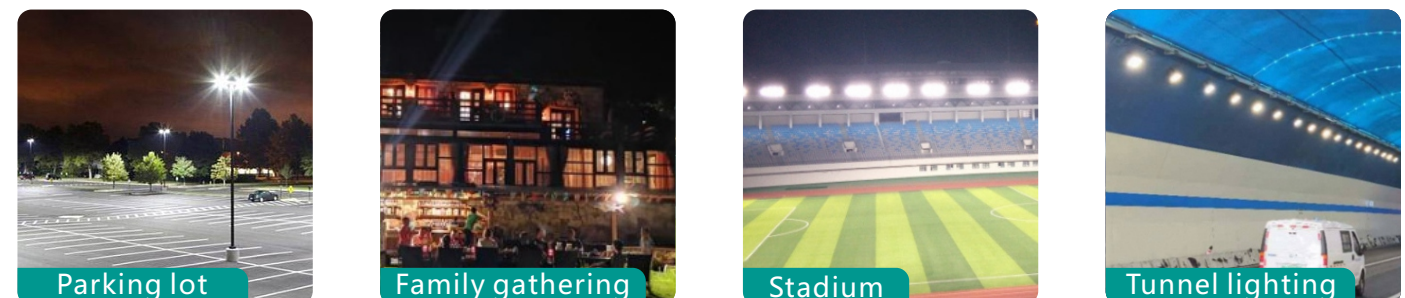



BONTOP Lighting

Flood light (Aluminum)



PRODUCT PARAMETERS


- Voltage: 175-265V. 50-60Hz
- Ra: ≥ 80
- Beam Angle: 180°
- Service life: 25000 Hours
- PF: ≥ 0.9
- Material: Aluminum+lens+ glass
- Lamp type: SMD
- Driver/adapter: Drive non-isolation



Die-cast aluminum lamp body Efficient heat dissipation design High-lighted LED light beads Lamp seal design water and dust

Model No.	Color	Power	LED	Lamp's Body Size	Carton Size	PCS/Box
A6-6602	WH/WW	200W	288	370*240*75mm	42*39*51cm	10
A6-6603	WH/WW	300W	396	370*325*75mm	39*32*34.5cm	5
A6-6604	WH/WW	400W	504	410*325*75mm	42*33*9cm	1
A6-6605	WH/WW	500W	684	480*340*75mm	49*35*9cm	1
A6-6606	WH/WW	600W	756	480*340*75mm	49*35*9cm	1
A6-6610	WH/WW	1000W	1500	690*340*75mm	73*35*9.5m	1

Installation display

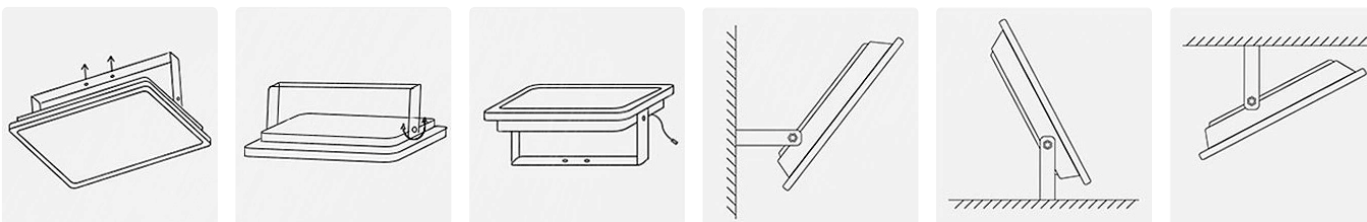

1. Attach to the wall 2. Adjust the Angle 3. Connect the power cord 4. Wall mounting 5. Pedestal mounting 6. Ceiling mounting




BONTOP Lighting

Flood light (Aluminum)



PRODUCT PARAMETERS


- Voltage: 175-265V. 50-60Hz
- Ra: ≥ 80
- Beam Angle: 180°
- Service life: 25000 Hours
- PF: ≥ 0.9
- Material: Aluminum+lens+ glass
- Lamp type: SMD
- Driver/adapter: Drive non-isolation

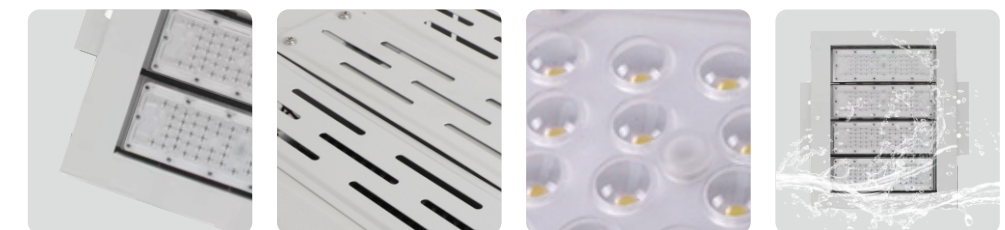

Thickened aluminum Efficient heat dissipation design LED high light beads Lamp seal design water and dust

Model No.	Color	Power	Lamp's Body Size	Carton Size	PCS/Box
A6-6310	WH/WW	100W	335*245*90mm	33.6*52*28cm	20
A6-6315	WH/WW	150W	335*335*90mm	33.6*52*28cm	20
A6-6320	WH/WW	200W	420*335*90mm	54.1*31.5*21cm	10

Installation display

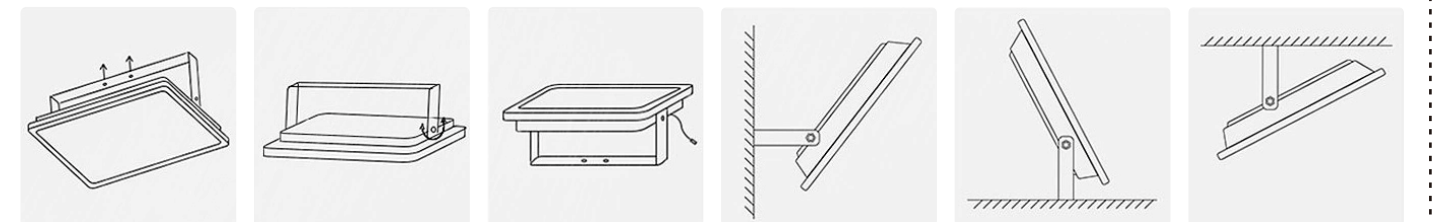


1. Attach to the wall 2. Adjust the Angle 3. Connect the power cord 4. Wall mounting 5. Pedestal mounting 6. Ceiling mounting





BONTOP Lighting

Flood light (Aluminum)

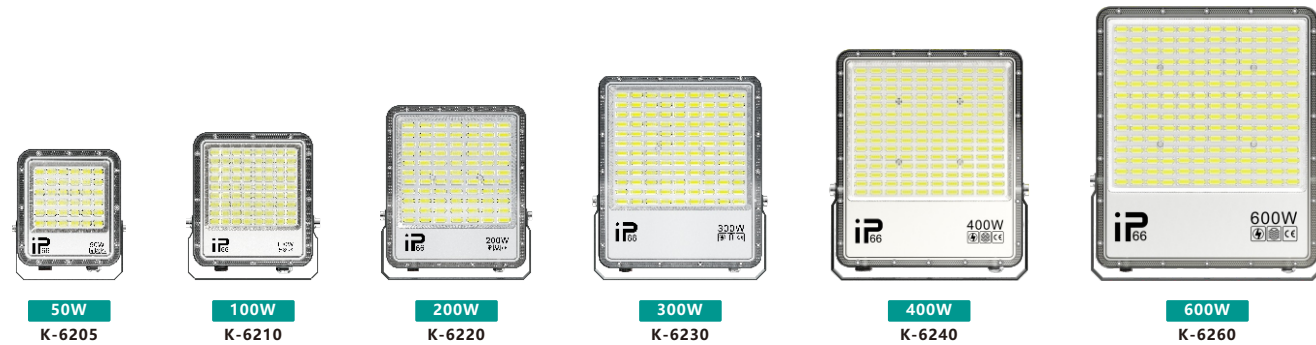


PRODUCT PARAMETERS

- Voltage: 175-265V. 50-60Hz
- Ra: ≥ 80
- Beam Angle: 180°
- Service life: 25000 Hours
- PF: ≥ 0.9
- Material: Aluminum
- Lamp type: SMD
- non-isolation



Model No.	Color	Power	Lamp's Body Size	Carton Size	PCS/Box
K-6203	WH/WW	30W	137.3*117*25mm	33.6*52*28cm	20
K-6205	WH/WW	50W	147.6*147*6*25mm	33.6*52*28cm	20
K-6210	WH/WW	100W	208*183*25mm	54.1*31.5*21cm	10
K-6215	WH/WW	150W	233.75*203.75*25mm	64.5*25.4*21cm	5
K-6220	WH/WW	200W	273.45*233.45*27mm	54.1*31.5*21cm	10
K-6230	WH/WW	300W	323.5*273.5*27mm	64.5*25.4*21cm	5
K-6240	WH/WW	400W	353.5*303.5*30mm	64.5*25.4*21cm	5
K-6260	WH/WW	600W	403.5*345.3*30mm	66*28*24cm	4

Installation display

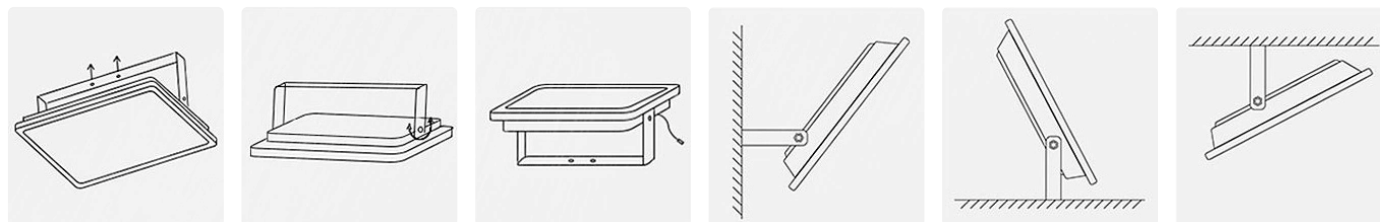

1. Attach to the wall 2. Adjust the Angle 3. Connect the power cord 4. Wall mounting 5. Pedestal mounting 6. Ceiling mounting



BONTOP Lighting

Flood light (Aluminum)




PRODUCT PARAMETERS

- Voltage: 175-265V. 50-60Hz
- Ra: ≥ 80
- Beam Angle: 180°
- Service life: 25000 Hours
- PF: ≥ 0.9
- Material: Aluminum+lens+ glass
- Lamp type: SMD
- Driver/adaptor: Drive non-isolation




Model No.	Color	Power	Lamp's Body Size	Carton Size	PCS/Box
A6-6401	WH/WW	10W	101*81*26mm	49*34*24.5cm	100
A6-6402	WH/WW	20W	118*93*28mm	53*37*27.5cm	100
A6-6403	WH/WW	30W	161*126*28mm	40.5*37*35cm	60
A6-6405	WH/WW	50W	205*152*29mm	44.5*42*33.5cm	40
A6-6410	WH/WW	100W	269*217*35mm	45.5*42*29.5cm	20
A6-6415	WH/WW	150W	335*238*35mm	47*36*26cm	10
A6-6420	WH/WW	200W	378*289*35mm	47*40.5*31cm	10
A6-6430	WH/WW	300W	434*330*39mm	46.5*35.5*32cm	5

Installation display

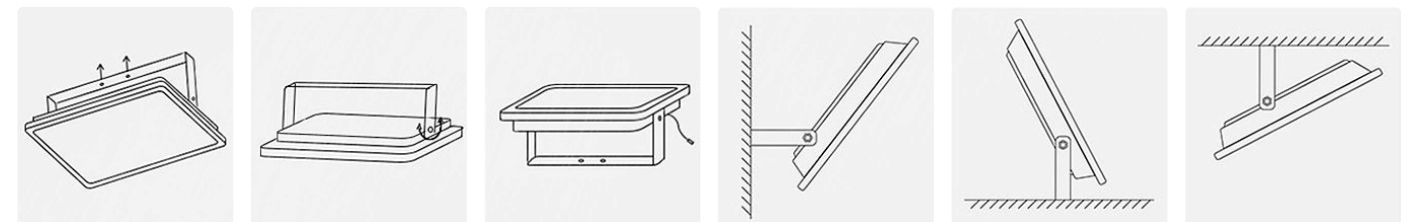

1. Attach to the wall 2. Adjust the Angle 3. Connect the power cord 4. Wall mounting 5. Pedestal mounting 6. Ceiling mounting

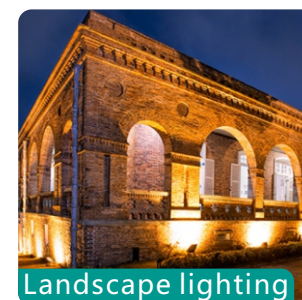




BONTOP Lighting

Flood light (Aluminum)



PRODUCT PARAMETERS

- Voltage: 175-265V. 50-60Hz
- Ra: ≥ 80
- Beam Angle: 180°
- Service life: 25000 Hours
- PF: ≥ 0.9
- Material: Aluminum+lens+ glass
- Lamp type: SMD
- Driver/adaptor: Drive non-isolation



The aluminum housing dissipates heat quickly



LED high light beads




180° adjustable bracket



Lamp seal design water and dust

Model No.	Color	Power	Lamp's Body Size	Carton Size	PCS/Box
A6-6501	WH/WW	10W	84*69*22mm	42*30*21cm	100
A6-6502	WH/WW	20W	102*84*23mm	36*30*30.5cm	90
A6-6503	WH/WW	30W	124*102*24mm	62*28*25cm	80
A6-6505	WH/WW	50W	159*130*25mm	45*32*36cm	60
A6-6507	WH/WW	70W	179*147*25mm	77*33.5*21cm	50
A6-6510	WH/WW	100W	224*184*25mm	48.5*32*41cm	40
A6-6515	WH/WW	150W	254*208*26mm	50.5*46.5*29cm	30
A6-6520	WH/WW	200W	300*246*26mm	53.5*34*33cm	20
A6-6530	WH/WW	300W	352*289*28mm	38*37*32cm	10
A6-6540	WH/WW	400W	412*338*28mm	44*19.5*37cm	5

Installation display

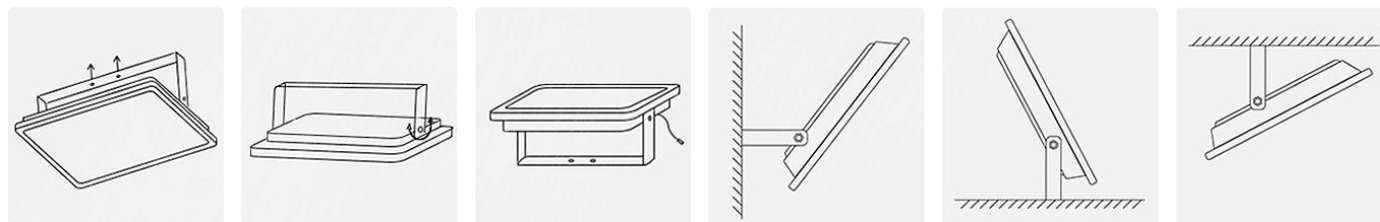

1. Attach to the wall
2. Adjust the Angle
3. Connect the power cord
4. Wall mounting
5. Pedestal mounting
6. Ceiling mounting




Outdoor high pole



Chemical plant



park



Outdoor court




BONTOP Lighting

Flood light (Aluminum)



PRODUCT PARAMETERS

- Voltage: 175-265V. 50-60Hz
- Rendering finger: ≥ 80
- Beam Angle: 180°
- Service life: 2 Years
- PF: ≥ 0.9
- Material: Aluminum + cloth glass
- Lamp type: SMD



Back aluminum integrated heat dissipation



180° adjustable bracket




LED high light beads



Lamp seal design water and dust

Model No.	Color	Power	Lamp's Body Size	Carton Size	PCS/Box
A6-6105	WH/WW	50W	25.5*4.6*22.5cm	58.5*23.5*28.5cm	10
A6-6110	WH/WW	100W	30*5*26.5cm	63.5*28*33cm	10
A6-6115	WH/WW	200W	32*5.2*35.5cm	41.5*34*40.5cm	6
A6-6120	WH/WW	300W	36.5*6*39.5cm	38*25*40.5cm	4

Installation display

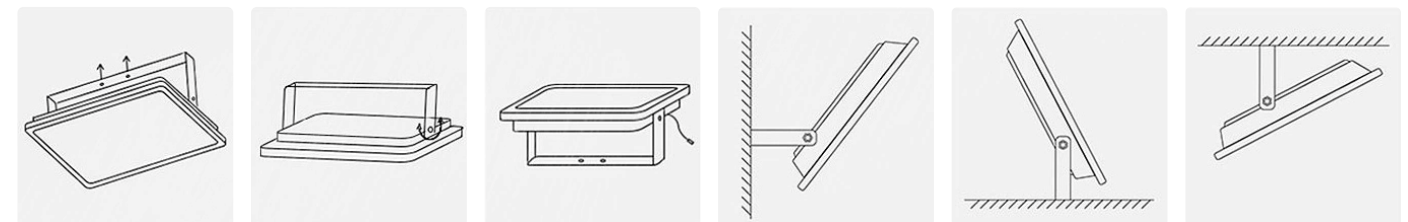


1. Attach to the wall
2. Adjust the Angle
3. Connect the power cord
4. Wall mounting
5. Pedestal mounting
6. Ceiling mounting




courtyard



Villa lighting



Advertising board



villa



Solar floodlight (ABS)



PRODUCT PARAMETERS

- Ra: ≥80
- Service life: 25000 Hours
- PF: ≥0.9
- Material: ABS
- Lamp type: SMD
- Charging Time: 8-10Hours
- Working Time: 10-15Hours



This shop is the original battery



Upgrade headlight beads + lensest



Corrosion prevention, rust prevention and heat dissipation



Upgrade technology no bubbles

Model No.	Power	LED	Color	Battery	Solar Planl	Lamp's Body Size	Solar panel size	Weight	Carton Sirze	PCS/Box
A8-2002	100W	270	WH/WW	5000	6V8W	243*194*50mm	235*350cm	1.6	50.5*47*37.5cm	10
A8-2005	200W	585	WH/WW	10000	6V12W	323*244*50mm	350*290cm	2.0	61.5*52*37*5cm	10
A8-2007	300W	825	WH/WW	15000	6V20W	364*268*50mm	350*450cm	1.6	61.5*57*37.5cm	5

Installation display



Drill the wall to be placed with a drill



Hammer the wall nails in place



Align the hole in the light holder with the wall nail



Install the product in the directions shown



garage



outdoors



garden



courtyard



Solar floodlight (ABS)



PRODUCT PARAMETERS

- Sensor: Day-Night+Remoto control
- Charging Time: 8-10Hours
- Working Time: 10-15Hours
- Life Span: 30000Hours
- LED Source: 5730
- Material: ABS
- Battery Type: 32650 Lithium ion
- Color Temperatur: 8000K/3000K



Tempered glass does not yellow and is durable



Tempered solar panels have a long life




The bracket rotates 180°



LED high light beads

Model No.	Power	LED	Color	Battery	Solar Planl	Lamp's Body Size	Solar panel size	Carton Size	PCS/Box
A8-1102	1000W	78	WH/WW	5000	6V8W	245*220*55cm	235*350cm	50.5*47*37.5cm	10
A8-1105	1500W	202	WH/WW	10000	6V12W	320*290*61cm	350*290cm	61.5*52*37.5cm	10
A8-1107	2000W	622	WH/WW	15000	6V20W	405*350*64cm	350*450cm	54.5*47*37.5cm	5

Installation display




1. Attach to the wall



2. Adjust the Angle




3. Connect the power cord




4. Wall mounting



5. Pedestal mounting



6. Ceiling mounting

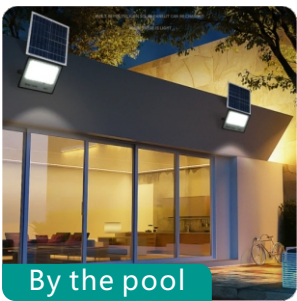

By the pool



villa



courtyard




In the doorway



BONTOP Lighting

Solar floodlight (Aluminum)

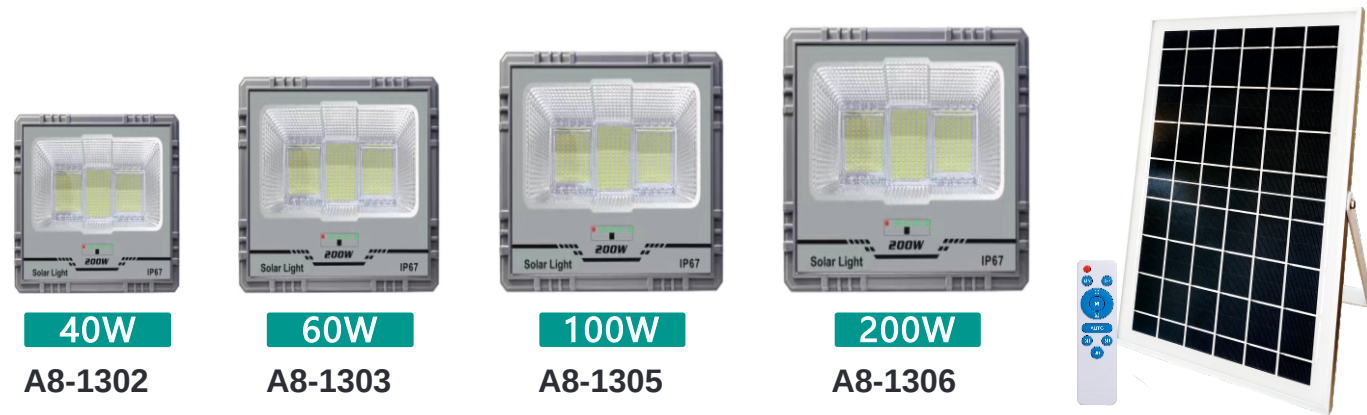

PRODUCT PARAMETERS

- Voltage: 175-265V. 50-60Hz
- Ra: ≥ 80
- Beam Angle: 180°
- Service life: 25000 Hours
- Material: Aluminum+Glass
- Lamp type: SMD



Adjustable support


Efficient cooling aluminum housing

High light transmission panel

Sealed waterproof plug

Model No.	Power	Carton Size	LED	Color	Battery	Solar Panel	Lamp's Body Size	Weight	Carton Size	PCS/Box
A8-1302	40W	270*180	66	WH/WW	5000	6V6W	232*185*53mm	1.5	57*46.5*39.5cm	20
A8-1303	60W	350*290	86	WH/WW	5000	6V12W	256*208*65mm	1.8	61.5*57*37.5cm	10
A8-1305	100W	350*450	164	WH/WW	10000	6V20W	305*250*75mm	2.0	59.5*47*37.5cm	5
A8-1306	200W	350*530	280	WH/WW	20000	6V25W	357*276*80mm	2.1	55*50*37.5cm	4

Installation display

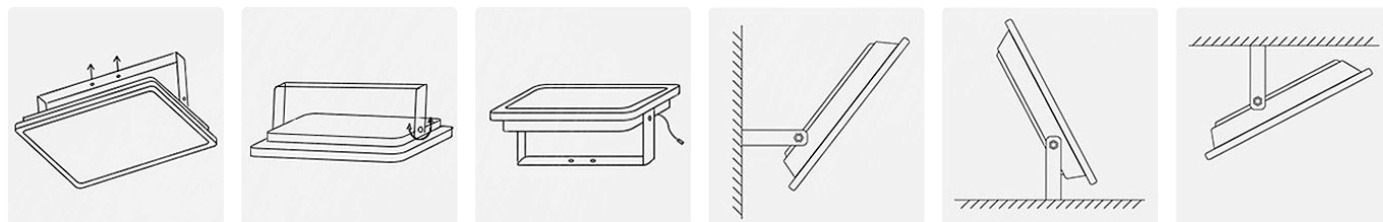

1. Attach to the wall

2. Adjust the Angle

3. Connect the power cord

4. Wall mounting

5. Pedestal mounting


6. Ceiling mounting



Basketball court



Field of play

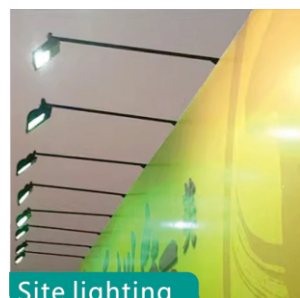

Site lighting



courtyard



BONTOP Lighting

Solar floodlight (Aluminum)



PRODUCT PARAMETERS

- Voltage: 175-265V. 50-60Hz
- Ra: ≥ 80
- Beam Angle: 180°
- Service life: 25000 Hours
- Material: Aluminum+Glass
- Lamp type: SMD



Adjustable support


Efficient cooling aluminum housing

High light transmission panel

Sealed waterproof plug

Model No.	Power	Carton Size	LED	Color	Battery	Solar Panel	Lamp's Body Size	Weight	Carton Size	PCS/Box
A8-1502	60W	350*290	40	WH/WW	5000	6V6W	232*185*53mm	1.5	57*46.5*39.5cm	20
A8-1503	100W	350*290	66	WH/WW	5000	6V12W	256*208*65mm	1.8	61.5*57*37.5cm	10
A8-1505	150W	350*450	104	WH/WW	10000	6V20W	305*250*75mm	2.0	59.5*47*37.5cm	5
A8-1506	200W	350*530	150	WH/WW	20000	6V25W	357*276*80mm	2.1	55*50*37.5cm	4

Installation display

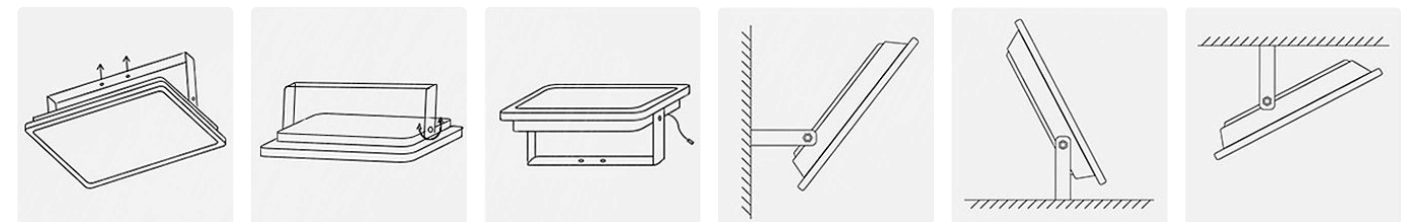

1. Attach to the wall

2. Adjust the Angle

3. Connect the power cord


4. Wall mounting

5. Pedestal mounting


6. Ceiling mounting



Basketball court

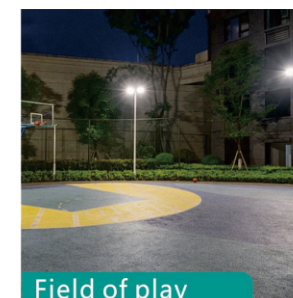

Field of play

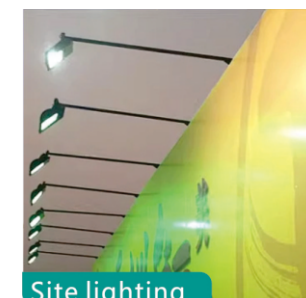

Site lighting



courtyard



BONTOP Lighting

Solar floodlight (Aluminum)



Strong light source




50W

A8-1002




150W

A8-1003




200W

A8-1005



300W

A8-1006



500W

A8-1007

PRODUCT PARAMETERS

- Sensor: Day-Night+Remoto control
- Charging Time: 8-10Hours
- Working Time: 10-15Hours
- Life Span:30000Hours
- LED Source:5730
- Material:Die casted Aluminum+glass
- Battery Type: 32650 Lithium ion
- Color Temperatur: 8000K/3000K



Die-cast aluminum housing does not rust



Electroplated reflective cup



Tempered glass does not yellow and is durable



Tempered solar panels have a long life

Model No.	Power	LED	Color	Battery	Solar Planl	Solar Planl's size	Lamp's Body Size	Weight	Carton Size	PCS/Box
A8 1002	50W	143	WH/WW	10000	6V 12W	235*350*16mm	240*62*205mm	2.4	46*39.5*27.5cm	8
A8 1003	150W	167	WH/WW	15000	6V 15W	350*450*16mm	277*69*227mm	4.3	48.5*43*38.5	6
A8 1005	200W	269	WH/WW	20000	6V 25W	350*530*16mm	310*80*280mm	5.1	49.5*34*30.5cm	4
A8 1006	300W	395	WH/WW	25000	6V 30W	350*600*16mm	350*85*300mm	7.2	49.5*38*33cm	2
A8 1007	500W	629	WH/WW	30000	6V 35W	350*670*16mm	350*90*420mm	8.0	46*45*39.5cm	2


Installation procedure




Step 1



Step 2




Step 3




Step 4


Three installation methods



1. Wall mounting




2. Pedestal mounting




3. Ceiling mounting



outdoor



courtyard



Activity place



Outdoor roof



BONTOP Lighting

Sword road lamp holder (Aluminum)



50W

A6-8205



100W

A6-8210



150W

A6-8215



200W

A6-8220




250W

A6-8225

PRODUCT PARAMETERS

- Voltage: 175-265V. 50-60Hz
- Ra: ≥ 80
- Beam Angle: 180°
- Service life: 25000 Hours
- PF: ≥ 0.9
- Material: Aluminum+lens+ glass
- Lamp type: COB
- Driver/adaptor: Drive non-isolation



Efficient aluminum sheet cooling design



Die cast aluminum lamp body



Integrated lens light source



Waterproof face mask

Model No.	Color	Power	Lamp's Body Size	Carton Size	PCS/Box
A6-8205	WH/WW	50W	500*215*80mm	52.5*24*9cm	1
A6-8210	WH/WW	100W	720*280*80mm	73*29*11.3cm	1
A6-8215	WH/WW	150W	860*320*80mm	87*33*11.3cm	1
A6-8220	WH/WW	200W	950*330*80mm	96*33*11.3cm	1
A6-8225	WH/WW	250W	1100*335*80mm	111.5*34*11.3cm	1



When people enter the detection range, the detector automatically lights up, and turns off the light after leaving for about 30 seconds



day Automatic light off



Night Automatic light switch





BONTOP Lighting

Street light (Aluminum)



PRODUCT PARAMETERS

- Voltage: 175-265V. 50-60Hz
- Ra: ≥ 80
- Beam Angle: 180°
- Service life: 25000 Hours
- PF: ≥ 0.9
- Material: Aluminum+lens+ glass
- Lamp type: SMD
- Driver/adapter: Drive non-isolation



Model No.	Color	Power	Lamp's Body Size	Carton Size	PCS/Box
A6-8105	WH/WW	50W	390*280*90mm	39.5*28.5*12cm	1
A6-8110	WH/WW	100W	440*280*90mm	45*29*12.5cm	1
A6-8115	WH/WW	150W	540*280*90mm	56*29*12.5cm	1
A6-8120	WH/WW	200W	620*280*90mm	65.5*32.5*13cm	1
A6-8125	WH/WW	250W	700*280*90mm	72*29*12.5cm	1



BONTOP Lighting

solar street light (ABS)



PRODUCT PARAMETERS

- Charging Time: 8-10Hours
- Working Time: 10-15Hours
- Life Span: 30000Hours
- LED Source: 5730
- Material: ABS
- Battery Type: 32650 Lithium ion
- Color Temperatur: 8000K/3000K




Multi-process exquisite, solid and durable, long service life



People come to light, people go light automatically lower brightness



High-power polycrystalline silicon solar panels, efficient charging



Ultra bright power saving chip

Model No.	Power	LED	color	Battery	Solar Planl	Lamp's Body Size	Carton Size	Weight	Carton Size	PCS/Box
A8-1701	100W	66	WH	5000	6V8W	439*236*64cm	330*231cm	17.3	50*37*46.5cm	10
A8-1702	200W	109	WH	15000	6V10W	559*236*64cm	450*231cm	22.5	50*37*50cm	10
A8-1703	300W	181	WH	20000	6V14W	689*237*64cm	550*231cm	14.5	71*37*25.5cm	5

Installation display



Wall mounting




Pole mounting




Derrick installation



Photovoltaic panel

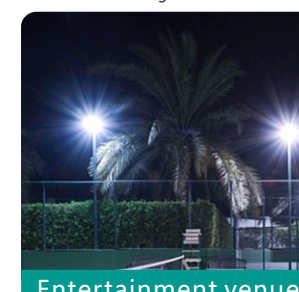

Entertainment venue

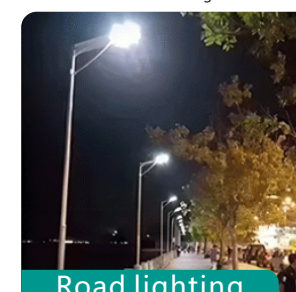

Road lighting



Court Lighting



Village street lighting



BONTOP Lighting

solar street light (ABS)



200W

A8-2702



400W

A8-2703



600W

A8-2704




800W


A8-2705

PRODUCT PARAMETERS

- Charging Time: 8-10Hours
- Working Time: 10-15Hours
- Life Span: 30000Hours
- LED Source: 5730
- Material: ABS
- Battery Type: 32650 Lithium ion
- Color Temperatur: 8000K/3000K




Multi-process exquisite, solid and durable, long service life



People come to light, people go light automatically lower brightness



High-power polycrystalline silicon solar panels, efficient charging



Ultra bright power saving chip

Model No.	Power	Color	Battery	Solar Planl	Lamp's Body Size	Solar panel Size	Carton Size	PCS/Box
A8-2702	200W	WH/WW	5000	6V8W	450*250mm	209*335mm	46.5*46.5*26cm	6
A8-2703	400W	WH/WW	8000	6V10W	530*250mm	209*413mm	54.5*47.5*26cm	6
A8-2704	600W	WH/WW	10000	6V12W	610*260mm	209*491mm	62*40*47cm	5
A8-2705	800W	WH/WW	15000	6V15W	650*270mm	209*569mm	70*32.5*28cm	4

Installation display



Wall mounting



Pole mounting




Derrick installation



Photovoltaic panel



Entertainment venue

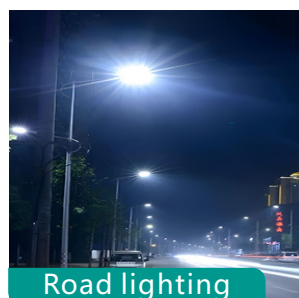

Road lighting



Court Lighting



Village street lighting



BONTOP Lighting

solar street light (ABS)



30W

A8-2501



60W

A8-2502



90W

A8-2503



120W

A8-2504




150W

A8-2505

PRODUCT PARAMETERS


- Charging Time: 8-10Hours
- Working Time: 10-15Hours
- Life Span: 30000Hours
- LED Source: 5730
- Material: ABS
- Battery Type: 32650 Lithium ion
- Color Temperatur: 8000K/3000K




LED high light beads



Radar induction



Multi-silicon solar panels



Remote control

Model No.	Power	LED	color	Battery	Solar Planl	Lamp's Body Size	Carton Size	PCS/Box
A8-2501	30W	48	WH	5000	6V6W	39*20cm	41*32.5*42cm	10
A8-2502	60W	96	WH	5000	6V8W	49*21cm	50.5*31.5*47cm	10
A8-2503	90W	144	WH	10000	6V12W	62*24cm	64.5*32*27cm	5
A8-2504	120W	192	WH	15000	6V15W	72*24cm	74*33*27cm	5
A8-2505	150W	240	WH	15000	6V18W	82*24cm	84.5*35*25cm	5




When people enter the detection range, the detector automatically lights up, and turns off the light after leaving for about 30 seconds



day Automatic light off



Night Automatic light switch

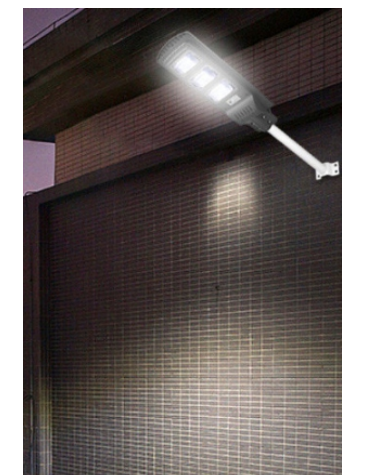



BONTOP Lighting

solar street light (ABS)



200W
A8-2202



300W
A8-2203



400W
A8-2204



PRODUCT PARAMETERS


- Charging Time: 8-10Hours
- Working Time: 10-15Hours
- Life Span: 30000Hours
- LED Source: 5730
- Material: ABS
- Battery Type: 32650 Lithium ion
- Color Temperatur: 8000K/3000K




LED high light beads



Radar induction



Multi-silicon solar panels



Remote control

Model No.	Power	LED	Color	Solar panel	Battery	Lamp's Body Size	Carton Size	PCS/Box
A8-2202	200W	576	WH	18W	15000mAh	33.5*36cm	43*36*47cm	5
A8-2203	300W	864	WH	25W	20000mAh	33.5*51cm	62.5*35*37cm	5
A8-2204	400W	1152	WH	30W	25000mAh	33.5*59cm	70*35*37cm	4



BONTOP Lighting

solar street light (ABS)



80W
A8-2602



120W
A8-2603



120W
A8-2603




80W
A8-2604



80W
A8-2604




120W
A8-2606

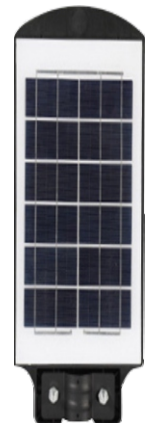

PRODUCT PARAMETERS


- Charging Time: 8-10Hours
- Working Time: 10-15Hours
- Life Span: 30000Hours
- LED Source: 5730
- Material: ABS
- Battery Type: 32650 Lithium ion
- Color Temperatur: 8000K/3000K




LED high light beads



Radar induction




Multi-silicon solar panels



Remote control

Model No.	Power	LED	Color	Battery	Solar Planl	Lamp's Body Size	Carton Size	PCS/Box
A8-2301	50W	48	WH	5000	6V4W	18*20cm	21.3*63*31cm	10
A8-2302	100W	96	WH	5000	6V6W	18*30cm	21*65*31cm	10
A8-2303	150W	144	WH	10000	6V9W	20*39cm	23.3*75*51cm	10
A8-2304	200W	192	WH	10000	6V10W	21*50cm	25*80*63cm	5
A8-2305	250W	240	WH	15000	6V16W	21*58cm	25*80*74.5cm	5
A8-2306	300W	288	WH	15000	6V18W	21*67cm	25*80*82cm	5

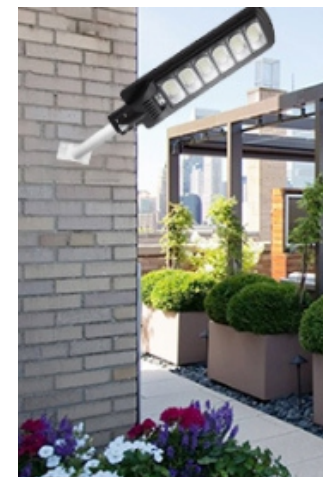




BONTOP Lighting

solar street light (ABS)



PRODUCT PARAMETERS

- Charging Time: 8-10Hours
- Working Time: 10-15Hours
- Life Span: 30000Hours
- LED Source: 5730
- Material: ABS
- Battery Type: 32650 Lithium ion
- Color Temperatur: 8000K/3000K




LED high light beads



Radar induction



Multi-silicon solar panels



Remote control

Model No.	Power	LED	Color	Battery	Solar Planl	Lamp's Body Size	Carton Size	PCS/Box
A8-2602	80W	320	WH	10000	6V10W	57*23cm	58.5*43*25cm	6
A8-2603	120W	480	WH	15000	6V15W	70*25cm	71*36*26.5cm	5
A8-2604	80W	320	WH	10000	6V10W	57*23cm	58.5*43*25cm	6
A8-2606	120W	480	WH	15000	6V15W	70*25cm	71*36*26.5cm	5




BONTOP Lighting

solar street light (ABS)



PRODUCT PARAMETERS

- Charging Time: 8-10Hours
- Working Time: 10-15Hours
- Life Span: 30000Hours
- LED Source: 5730
- Material: ABS
- Battery Type: 32650 Lithium ion
- Color Temperatur: 8000K/3000K




LED high light beads



Radar induction



Multi-silicon solar panels



Remote control

Model No.	Power	LED	Color	Solar panel	Battery	Lamp's Body Size	Carton Size	PCS/Box
A8-2103	180W	480	WH	18W	15000mAh	45*34cm	43*36*47cm	5
A8-2104	240W	640	WH	25W	20000mAh	60*34cm	62.5*35*37cm	5
A8-2105	300W	800	WH	30W	25000mAh	70*34cm	69.5*34*5*37cm	4
A8-2106	360W	960	WH	35W	30000mAh	70*35cm	70*35*37cm	4





BONTOP Lighting

solar street light (Aluminum)



60W

A8-1802



120W


A8-1803

PRODUCT PARAMETERS

- Voltage: 175-265V. 50-60Hz
- Ra: ≥80
- Service life: 25000 Hours
- Material: Aluminum
- Battery Type: 32650 Lithium ion
- Color Temperatur: 8000K/3000K



The fixed arm is stable, giving the installation of multiple protection, not afraid of wind and rain



High efficiency conversion solar panels, high efficiency absorption



Ip65 waterproof standard, moisture-proof and cold-proof, durable



Using high quality LED lamp beads, with efficient performance

Model No.	Power	LED	Color	Battery	Solar Planl	Lamp's Body Size	Carton Size	Weight	Carton Size	PCS/Box
A8 1802	60W	98	WH	15000	6V20W	500*200*63mm	350*450cm	5	63*42*17.5cm	1
A8 1803	120W	124	WH	30000	6V35W	508*505*95mm	350*670cm	6.5	73*42*17.5cm	1

Installation display




Light pole installation



Light pole installation




Wall mounting

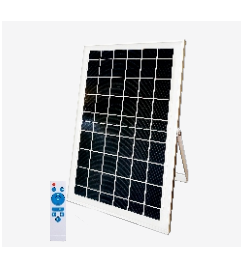

Photovoltaic panel



Column head

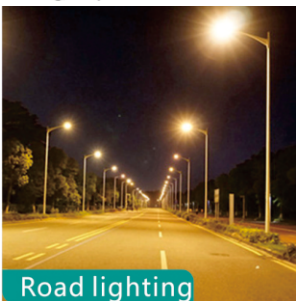

Road lighting



Soccer field lighting



Courtyard lighting



BONTOP Lighting

Solar ceiling light (ABS)



50W

A8-1201



100W

A8-1202



200W

A8-1203



PRODUCT PARAMETERS

- Product name: Solar ceiling lamp
- Lighting source: LED light source
- Solar panels: multi-product silicon solarpanels
- Lighting duration :8-10Hour (s)
- Product function: light control + intelligent remote control
- Battery type: Lithium iron phosphate
- Material: ABS




Strong and stable power supply flow, increased capacity, continuous battery life



Highlight LED chip Sensing external light



High transmittance PVC lamp shade




Polycrystalline silicon solar panels

Model No.	Power	LED	Color	Battery	Solar Planl	Solar Planl's size	Lamp's Body Size	Weight	Carton Size	PCS/Box
A8-1201	50W	139	WH/WW	5000	6V 8W	235*350*17mm	47*37*50.5mm	1.1	47*37*50.5cm	10
A8-1202	100W	206	WH/WW	10000	6V 12W	350*290*17mm	52*37*61.5mm	1.9	52*37*61.5cm	5
A8-1203	200W	284	WH/WW	15000	6V 15W	350*350*17mm	54.5*39*39.5mm	2.7	54.5*39*39.5cm	5

Installation procedure



Drill the wall to be placed with a drill

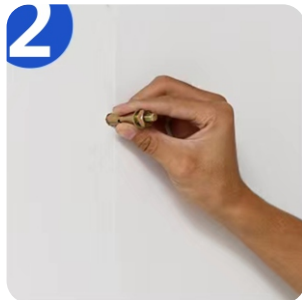

Secure the exploding screws with the town




Install the lamp and use the tool to twist the screws



Plug in the power and light up



vestibule

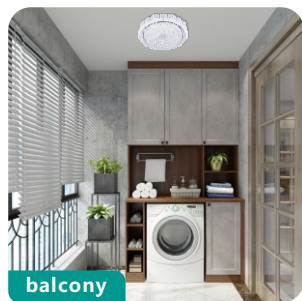

balcony



villa



Living room